

PARALLEL

Version

Built-in - 76 cm - White - 800 m³/h

Collection

Design

EAN code

8034122366319



*Photograph is for information purposes only
It may not correspond to the selected version.*

FEATURES

Touch control
Metallic grease filter, removable and washable
Remote control included
Dimmable lighting
Dynamic Light (2700K - 5600K)
Dialogue system with auto mode
Carbon.Zeo Microtech filter (optional)
Strip LED

Availability Carbon.Zeo filter
KACL.1039 for hoods produced
from Sept. 2024

OPTIONAL ACCESSORIES

KACL.1039

Carbon.Zeo Microtech filter

TECHNICAL FEATURES




Installation type
Built-in
Dimensions
76 cm
Finishing
Painted white steel
Tempered glass with white finishing
Motor
800 m³/h
Type of control
Touch control
Speed
3 + boost
Lighting
Led stripe
Minimum distance
Gas hob: 52 cm
Electric hob: 52 cm
Maximum distance
Gas hob: 150 cm
Electric hob: 150 cm

PACKAGING:WEIGHTS AND VOLUMES

Gross weight
17.6 kg
Net weight
9.4 kg
Volumes
0.12 m³
Packaging size
Length
995 mm
Height
410 mm
Depth
465 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
280 W
Voltage
220-240V
Frequency
50-60Hz
ENERGY CLASS
B



PARALLEL

Version

Built-in - 76 cm - White - 800 m3/h


Collection

Design

EAN code

8034122366319

ENERGY LABEL

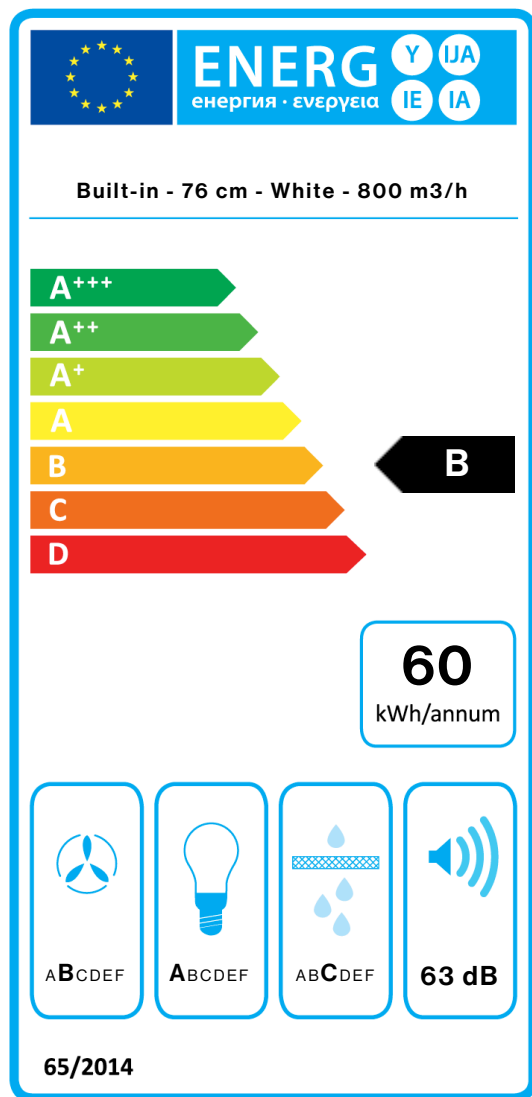

PF		
S	Falmec Spa	
M	Built-in - 76 cm - White - 800 m3/h	
AEC	59,5	kWh/a
EEC	B	
FDE	27,5	
FDEC	B	
LE	38,1	
LEC	A	
GFE	80,0	
GFEC	C	
Qmin	280,0	m³/h
Qmax	548,0	m³/h
Qboost	638,0	m³/h
SPEmin	50	dBa
SPEmax	63	dBa
SPEboost	67	dBa
PO	-	W
PS	0,28	W
PI		
F	1	
EEl	60,5	
Qbep	359,0	m³/h
Pbep	384	Pa
Qboost	638,0	m³/h
Wbep	139,0	W
WL	12,00	W
Emiddle	457	lux
Lwa-SPEmax	63	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax_Sound pressure level at the highest speed.