

## PARALLEL

### Version

Built-in - 76 cm - White - 800 m<sup>3</sup>/h

### Collection

Design

### EAN code

8034122366319



Photograph is for information purposes only  
It may not correspond to the selected version.

## FEATURES

**Touch control**  
**Metallic grease filter, removable and washable**  
**Remote control included**  
**Dimmable lighting**  
**Dynamic Light (2700K - 5600K)**  
**Dialogue system with auto mode**  
**Carbon.Zeo Microtech filter (optional)**  
**Strip LED**

Availability Carbon.Zeo filter  
KACL.1039 for hoods produced  
from Sept. 2024

## OPTIONAL ACCESSORIES

### KACL.1039

Carbon.Zeo Microtech filter

## TECHNICAL FEATURES




**Installation type**  
Built-in  
**Dimensions**  
76 cm  
**Finishing**  
Painted white steel  
Tempered glass with white finishing  
**Motor**  
800 m<sup>3</sup>/h  
**Type of control**  
Touch control  
**Speed**  
3 + boost  
**Lighting**  
Led stripe  
**Minimum distance**  
Gas hob: 52 cm  
Electric hob: 52 cm  
**Maximum distance**  
Gas hob: 150 cm  
Electric hob: 150 cm

## PACKAGING:WEIGHTS AND VOLUMES

**Gross weight**  
17.6 kg  
**Net weight**  
9.4 kg  
**Volumes**  
0.12 m<sup>3</sup>  
**Packaging size**  
Length  
995 mm  
Height  
410 mm  
Depth  
465 mm

## CONSUMPTION AND CONNECTION FEATURES

**Maximum consumption**  
280 W  
**Voltage**  
220-240V  
**Frequency**  
50-60Hz  
**ENERGY CLASS**  
B



## PARALLEL

### Version

Built-in - 76 cm - White - 800 m3/h


### Collection

Design

### EAN code

8034122366319

## ENERGY LABEL

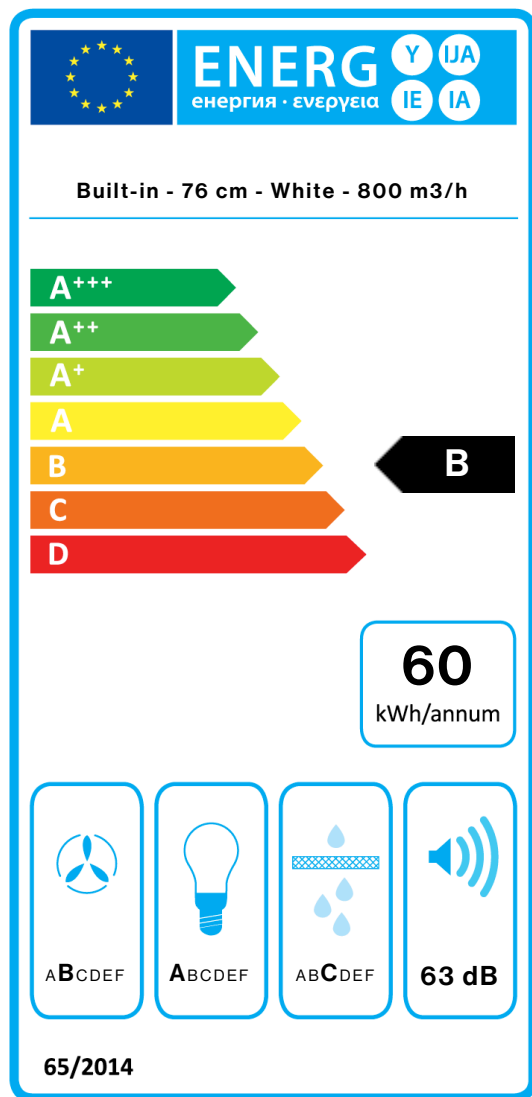

PF		
S	Falmec Spa	
M	Built-in - 76 cm - White - 800 m3/h	
AEC	59,5	kWh/a
EEC	B	
FDE	27,5	
FDEC	B	
LE	38,1	
LEC	A	
GFE	80,0	
GFEC	C	
Qmin	280,0	m³/h
Qmax	548,0	m³/h
Qboost	638,0	m³/h
SPEmin	50	dBa
SPEmax	63	dBa
SPEboost	67	dBa
PO	-	W
PS	0,28	W
PI		
F	1	
EEl	60,5	
Qbep	359,0	m³/h
Pbep	384	Pa
Qboost	638,0	m³/h
Wbep	139,0	W
WL	12,00	W
Emiddle	457	lux
Lwa-SPEmax	63	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m³/h) at min speed in normal use / Qmax\_Air flow (in m³/h) at max speed in normal use / Qboost\_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEl\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax\_Sound pressure level at the highest speed.