

PARALLEL

Versiune

Incorpat - 76 cm - alb - 800 m³/h

Colectie

Design

Cod EAN

8034122366319



Fotografie cu caracter strict orientativ
Aceasta poate sa nu corespunda versiunii selectate

CARACTERISTICI

Touch control
Filtru de grasime metalic, detasabil si lavabil
Telecomanda inclusa
Dimmable led lighting
Dynamic LED Light (2700K - 5600K)
Dialogue system cu mod automat
Carbon.Zeo Microtech filter (optional)
Strip LED

Availability Carbon.Zeo filter
KACL.1039 for hoods produced from Sept. 2024

ACCESORII OPTIONALE

KACL.1039

Carbon.Zeo Microtech filter

CARACTERISTICI TEHNICE

Tip de instalare
Incorporata

Dimensiuni
76 cm

Finisaj
Inox vopsit alb
Sticla tratata termic cu finisaj alb

Motor
800 m³/h

Tipul panoului de control
Touch control

Setari de viteza
3 + boost

Iluminare
Banda cu LED

Distanta minima
Plita cu gaz: 52 cm
Plita electrica: 52 cm

Plita cu gaz: 150 cm
Plita electrica: 150 cm

AMBALARE: GREUTATE SI VOLUM

Greutate bruta
17.6 kg

Greutate neta
9.4 kg

Volum
0.12 m³

Dimensiuni ambalaj
Lungime
995 mm
Inaltime
410 mm
Adancime
465 mm




CARACTERISTICI CONSUM SI CONEXIUNE

Consum maxim
280 W

Curent
220-240V

Frecventa
50-60Hz

CLASA DE ENERGIE
B



PARALLEL

Versiune

Incorpat - 76 cm - alb - 800 m3/h


Colectie

Design

Cod EAN

8034122366319

ETICHETA DE ENERGIE

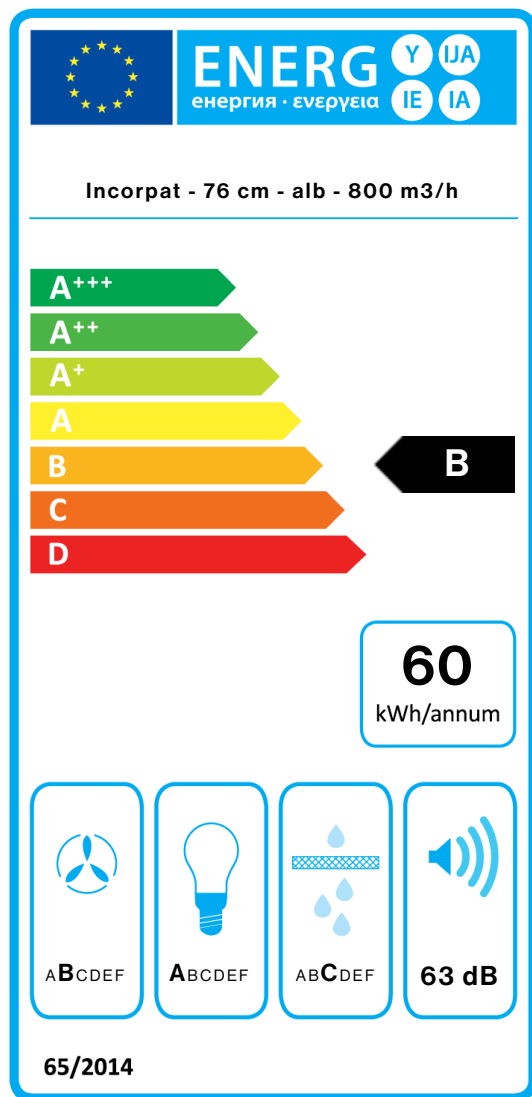

PF		
S	Falmec Spa	
M	Incorpat - 76 cm - alb - 800 m3/h	
AEC	59,5	kWh/a
EEC	B	
FDE	27,5	
FDEC	B	
LE	38,1	
LEC	A	
GFE	80,0	
GFEC	C	
Qmin	280,0	m ³ /h
Qmax	548,0	m ³ /h
Qboost	638,0	m ³ /h
SPEmin	50	dBa
SPEmax	63	dBa
SPEboost	67	dBa
PO	-	W
PS	0,28	W
PI		
F	1	
EEl	60,5	
Qbep	359,0	m ³ /h
Pbep	384	Pa
Qboost	638,0	m ³ /h
Wbep	139,0	W
WL	12,00	W
Emiddle	457	lux
Lwa-SPEmax	63	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax_Sound pressure level at the highest speed.