

PARALLEL

Versiyon

Built-in 76 cm - white - 800 m³/h

Koleksiyon

Design

EAN kodu

8034122366319



Fotoğraf tamamen bilgi amaçlıdır
Seçili versiyona ait olmayabilir.

ÖZELLİKLER

Dokunmatik kontrol
Çıkartılabilir ve yıkanabilir
Metal yağ filtresi
Uzaktan kumanda dahildir
Aydınlık seviyesi ayarlanabilir
led aydınlatma
Dinamik Led aydınlatma (2700K - 5600K)
Otomatik modlu diyalog sistemi
Carbon.Zeo Microtech filter (optional)
Strip LED

Availability Carbon.Zeo filter
KACL.1039 for hoods produced
from Sept. 2024

OPSİYONEL AKSESUARLAR

KACL.1039

Carbon.Zeo Microtech filter

TEKNİK ÖZELLİKLER

Kurulum tipi
Gömme
Ölçüler
76 cm
Finişler
Boyalı beyaz çelik
Beyaz finişli temperli cam
Motor
800 m³/h
Kontrol tipi
Dokunmatik kontrol
Hız ayarı
3 + boost
Aydınlatma
Led şeridi
Minimum uzaklık
Gazlı ocak: 52 cm
Elektrikli ocak: 52 cm



Gazlı ocak: 150 cm
Elektrikli ocak: 150 cm

PAKETLEME: AĞIRLIK VE HACİM

Brüt ağırlık
17.6 kg
Net ağırlık
9.4 kg
Hacimler
0.12 m³
Paketleme ölçüsü
Uzunluk
995 mm
Yükseklik
410 mm
Derinlik
465 mm

TÜKETİM VE BAĞLANTI ÖZELLİKLERİ

Maksimum tüketim
280 W
Akım
220-240V
Frekans
50-60Hz
ENERJİ SINIFI
B



PARALLEL

Versiyon

Built-in 76 cm - white - 800
m3/h


Koleksiyon

Design

EAN kodu

8034122366319

ENERJİ ETİKETİ

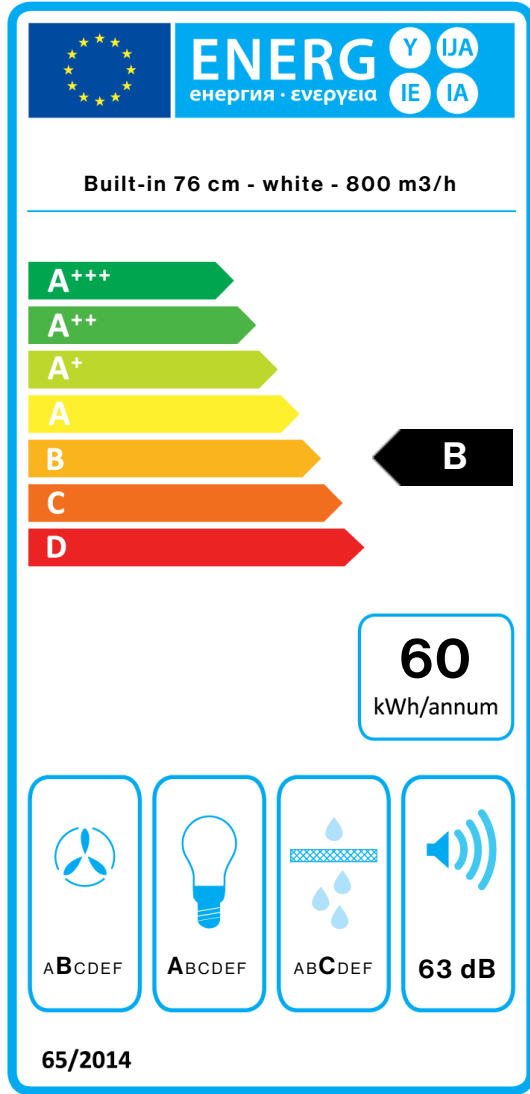

PF		
S	Falmec Spa	
M	Built-in 76 cm - white - 800 m3/h	
AEC	59,5	kWh/a
EEC	B	
FDE	27,5	
FDEC	B	
LE	38,1	
LEC	A	
GFE	80,0	
GFEC	C	
Qmin	280,0	m ³ /h
Qmax	548,0	m ³ /h
Qboost	638,0	m ³ /h
SPEmin	50	dBa
SPEmax	63	dBa
SPEboost	67	dBa
PO	-	W
PS	0,28	W
PI		
F	1	
EEl	60,5	
Qbep	359,0	m ³ /h
Pbep	384	Pa
Qboost	638,0	m ³ /h
Wbep	139,0	W
WL	12,00	W
Emiddle	457	lux
Lwa-SPEmax	63	dBa

65/2014'e göre PF_Ürün fişi S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **66/2014'e göre PI_Ek bilgi** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax_Sound pressure level at the highest speed.