

GRUPPO INCASSO PLUS

Version

Plus - Built-in - 50 cm - Inox -
800 m³/h

Designer

Collection

Design

EAN code

8034122367187

FEATURES

Perimeter suction
Electronic control
Metallic grease filter, removable
and washable
Optional charcoal filter
Optional remote control
Dimmable lighting
Dynamic Light (2700K - 5600K)
Dialogue system

OPTIONAL ACCESSORIES

103050091

Round charcoal filter Ø170 mm -
Type 6

105080053

Remote control

TECHNICAL FEATURES

Installation type
Built-in
Dimensions
50 cm
Finishing
Scotch brite stainless steel (AISI
304)
Motor
800 m³/h
Type of control
Electronic control
Speed settings
3 + boost
Lighting
Led 2x1,7 W - 2700 K / 5600 K
Minimum distance
Gas hob: 62 cm
Electric hob: 52 cm



*The photograph is purely for information
It may not correspond to the selected version.*

PACKAGING: WEIGHTS AND VOLUMES


Gross weight
10 kg
Net weight
7.6 kg
Volumes
0.09 m³
Packaging size
Length
635 mm
Height
380 mm
Depth
390 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
280 W
Current
220-240V
Frequency
50-60Hz

MOTOR TECHNICAL SHEET

Maximum capacity
638 m³/h
I.E.C. 61591
Maximum noise
67 dB(A)re1pW
I.E.C.60704-2-13
Maximum pressure (Pa)
510 Pa
Maximum power motor
245 W
ENERGY CLASS
B



GRUPPO INCASSO PLUS

Version

Plus - Built-in - 50 cm - Inox -
800 m³/h

Designer

Collection

Design


EAN code

8034122367187

MOTOR TECHNICAL SHEET

| Speed motor | 1 | 2 | 3 | 4 |
|--|-----|-----|-----|-----|
| Noise dB(A) _{re1pW-I.E.C.60704-2-13} | 50 | 58 | 63 | 67 |
| Capacity (m ³ /h) I.E.C.61591 | 280 | 420 | 548 | 638 |
| Maximum pressure (Pa) | 430 | 470 | 500 | 510 |
| Power (W) | 145 | 175 | 215 | 245 |
| Air outlet | 150 | 150 | 150 | 150 |

CAPACITY / PRESSURE

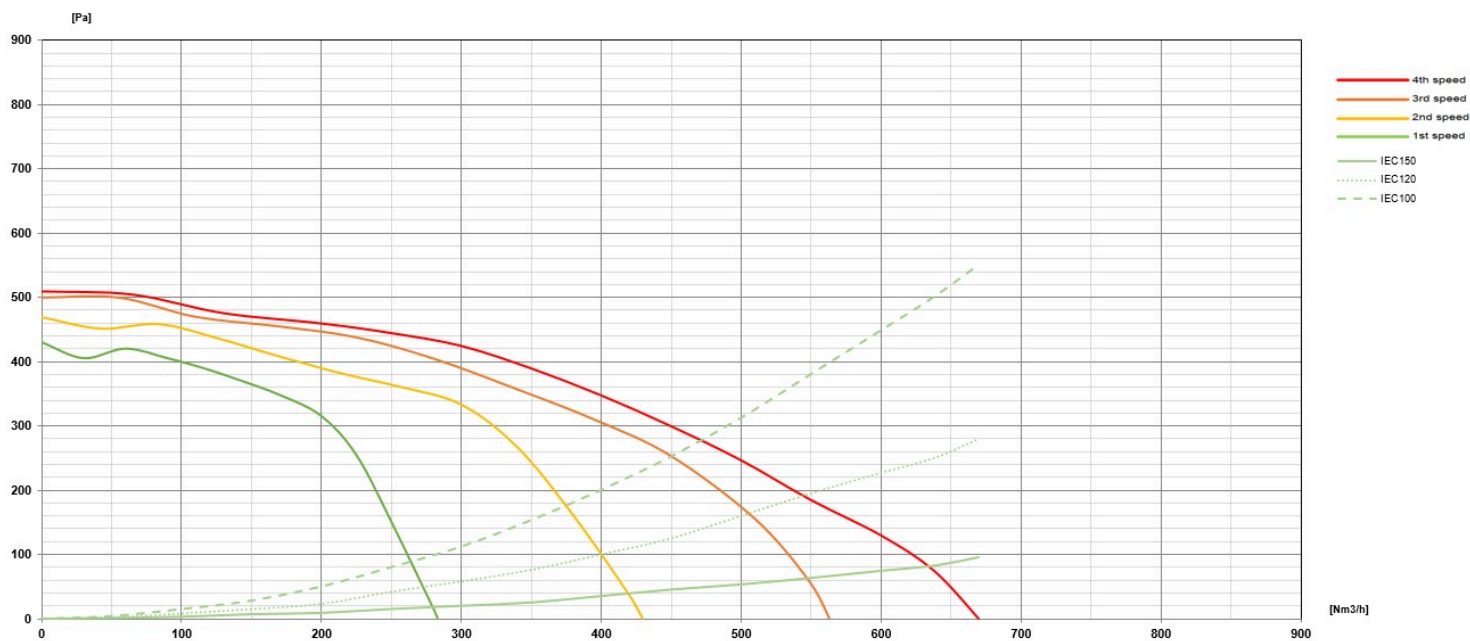

GRUPPO INCASSO PLUS

Version

Plus - Built-in - 50 cm - Inox -
800 m³/h

Designer


Collection

Design

EAN code

8034122367187

ENERGY LABEL

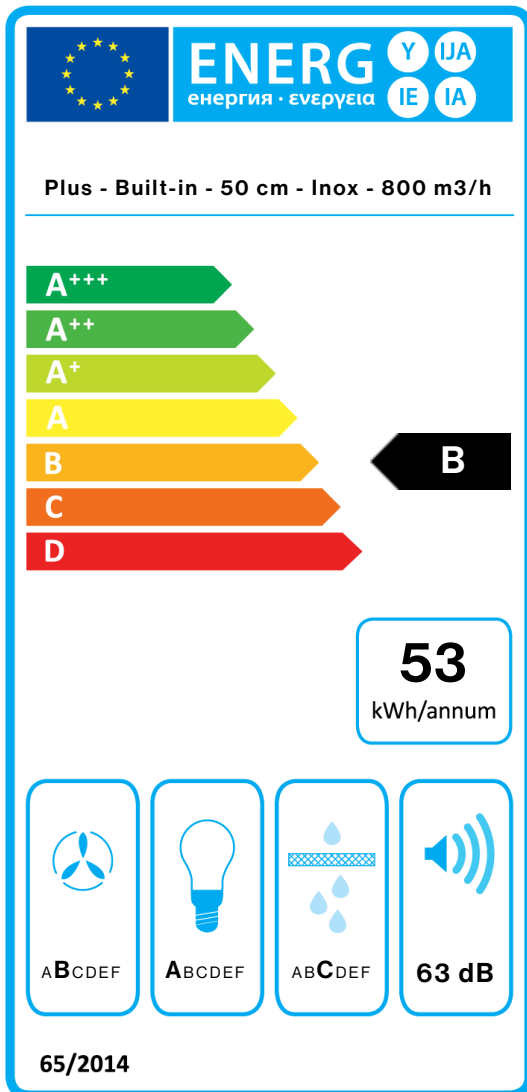

| PF | | |
|------------|--|-------------------|
| S | Falmec Spa | |
| M | Plus - Built-in - 50 cm - Inox - 800 m ³ /h | |
| AEC | 53,3 | kWh/a |
| EEC | B | |
| FDE | 27,5 | |
| FDEC | B | |
| LE | 32,9 | |
| LEC | A | |
| GFE | 80,0 | |
| GFEC | C | |
| Qmin | 280,0 | m ³ /h |
| Qmax | 548,0 | m ³ /h |
| Qboost | 638,0 | m ³ /h |
| SPEmin | 50 | dBa |
| SPEmax | 63 | dBa |
| SPEboost | 67 | dBa |
| PO | - | W |
| PS | 0,28 | W |
| PI | | |
| F | 1 | |
| EEl | 56,9 | |
| Qbep | 359,0 | m ³ /h |
| Pbep | 384 | Pa |
| Qboost | 638,0 | m ³ /h |
| Wbep | 139,0 | W |
| WL | 3,50 | W |
| Emiddle | 115 | lux |
| Lwa-SPEmax | 63 | dBa |

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point /

Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.