

GRUPPO INCASSO PLUS

Version

Plus - Built-in - 50 cm - Inox -
800 m³/h

Designer

Collection

Design

EAN code

8034122367187

FEATURES

Perimeter suction
Electronic control
Metallic grease filter, removable
and washable
Optional charcoal filter
Optional remote control
Dimmable lighting
Dynamic Light (2700K - 5600K)
Dialogue system

OPTIONAL ACCESSORIES

103050091

Round charcoal filter Ø170 mm -
Type 6

105080053

Remote control

TECHNICAL FEATURES

Installation type
Built-in
Dimensions
50 cm
Finishing
Scotch brite stainless steel (AISI
304)
Motor
800 m³/h
Type of control
Electronic control
Speed settings
3 + boost
Lighting
Led 2x1,7 W - 2700 K / 5600 K
Minimum distance
Gas hob: 62 cm
Electric hob: 52 cm



*The photograph is purely for information
It may not correspond to the selected version.*

PACKAGING: WEIGHTS AND VOLUMES


Gross weight
10 kg
Net weight
7.6 kg
Volumes
0.09 m³
Packaging size
Length
635 mm
Height
380 mm
Depth
390 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
280 W
Current
220-240V
Frequency
50-60Hz

MOTOR TECHNICAL SHEET

Maximum capacity
638 m³/h
I.E.C. 61591
Maximum noise
67 dB(A)re1pW
I.E.C.60704-2-13
Maximum pressure (Pa)
510 Pa
Maximum power motor
245 W
ENERGY CLASS
B



GRUPPO INCASSO PLUS

Version

Plus - Built-in - 50 cm - Inox -
800 m³/h

Designer

Collection

Design


EAN code

8034122367187

MOTOR TECHNICAL SHEET

Speed motor	1	2	3	4
Noise dB(A) _{re1pW-I.E.C.60704-2-13}	50	58	63	67
Capacity (m ³ /h) I.E.C.61591	280	420	548	638
Maximum pressure (Pa)	430	470	500	510
Power (W)	145	175	215	245
Air outlet	150	150	150	150

CAPACITY / PRESSURE

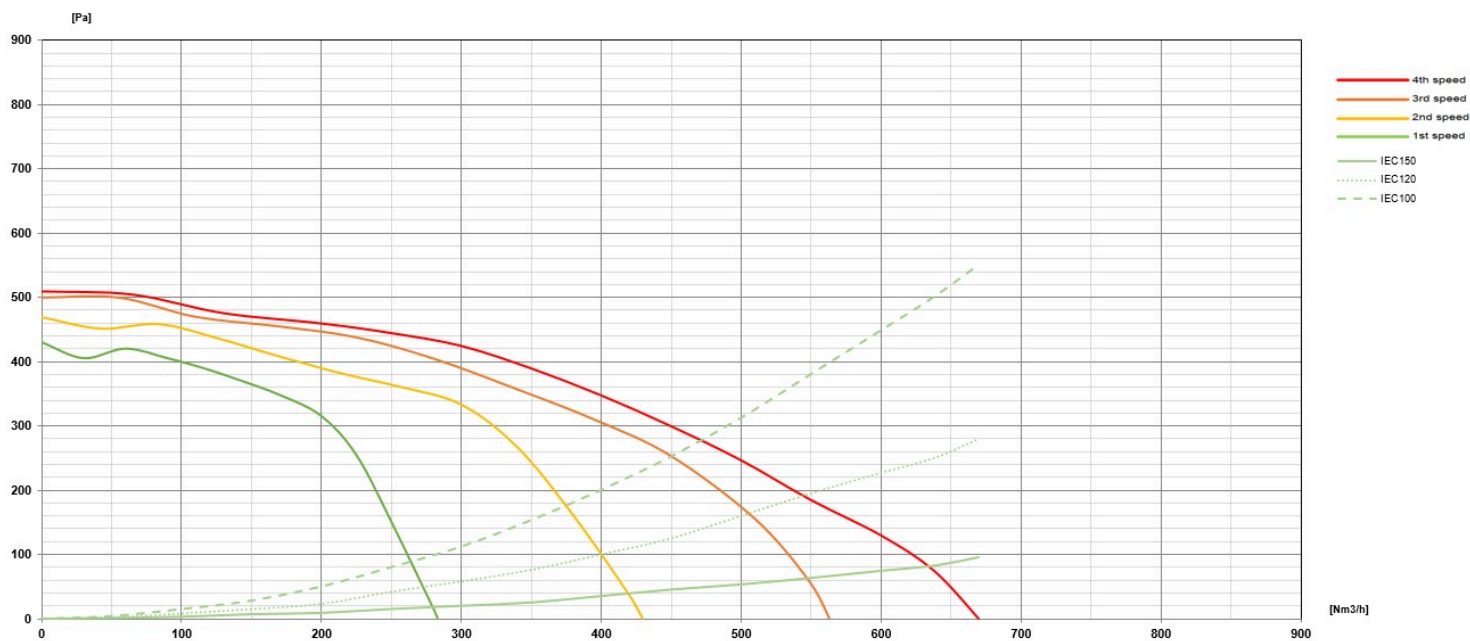

GRUPPO INCASSO PLUS

Version

Plus - Built-in - 50 cm - Inox -
800 m³/h

Designer


Collection

Design

EAN code

8034122367187

ENERGY LABEL

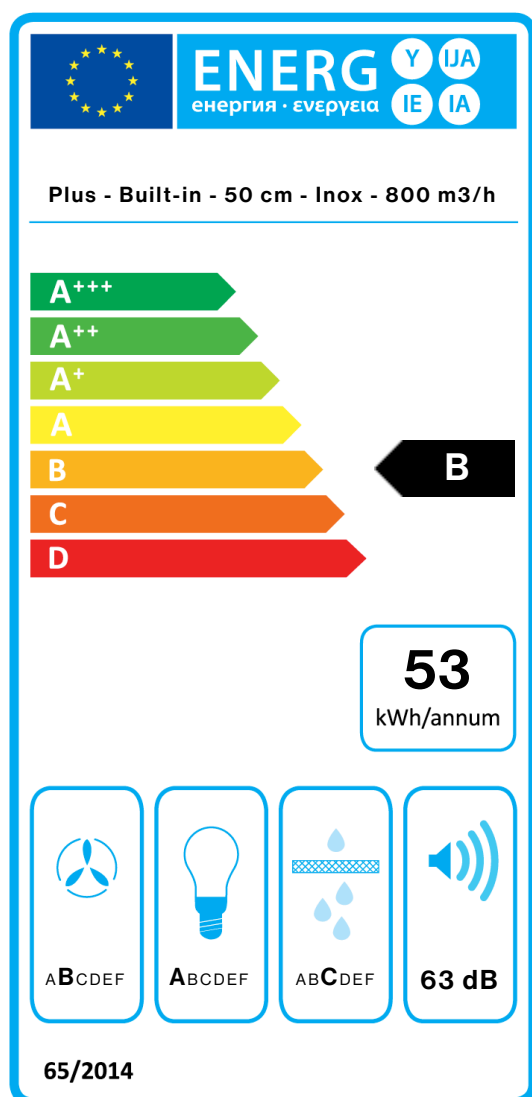

PF		
S	Falmec Spa	
M	Plus - Built-in - 50 cm - Inox - 800 m ³ /h	
AEC	53,3	kWh/a
EEC	B	
FDE	27,5	
FDEC	B	
LE	32,9	
LEC	A	
GFE	80,0	
GFEC	C	
Qmin	280,0	m ³ /h
Qmax	548,0	m ³ /h
Qboost	638,0	m ³ /h
SPEmin	50	dBa
SPEmax	63	dBa
SPEboost	67	dBa
PO	-	W
PS	0,28	W
PI		
F	1	
EEl	56,9	
Qbep	359,0	m ³ /h
Pbep	384	Pa
Qboost	638,0	m ³ /h
Wbep	139,0	W
WL	3,50	W
Emiddle	115	lux
Lwa-SPEmax	63	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point /

Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.