

## ALTAIR TOP

### Versiune

Insula 60 cm - 800 m<sup>3</sup>/h

### Colectie

Fasteel

### Cod EAN

8034122204567



Fotografie cu caracter strict orientativ  
Aceasta poate sa nu corespunda versiunii selectate

### CARACTERISTICI

**Inox FASTEEL (anti-amprente)**  
**Scotch Brite**  
**Aspiratie perimetrala**  
**Control electronic**  
**Iluminare cu LED**  
**Filtru de grasime metalic, detasabil si lavabil**  
**Filtru de carbon inclus**

### ACCESORII OPTIONALE

#### KACL.770#41F

Motor de acoperis 1100 m<sup>3</sup>/h  
Brushless

#### KACL.786#41F

Motor de exterior 1000 m<sup>3</sup>/h

#### KACL.796#4AF

Motor de exterior 1500 m<sup>3</sup>/h

#### KACL.797#4AF

Motor de acoperis 1300 m<sup>3</sup>/h

#### KACL.798#41F

Motor de acoperis 950 m<sup>3</sup>/h

### CARACTERISTICI TEHNICE

#### Tip de instalare

Insula

#### Dimensiuni

60 cm

#### Finisaj

Inox FASTEEL (anti-amprente)  
Scotch brite

#### Motor

800 m<sup>3</sup>/h

#### Tipul panoului de control

Control electronic

#### Setari de viteza

4

#### Iluminare

LED 4x1,2 W - 3200 K

#### Filtru

2 x Filtru metalic "Base" -  
235x245 mm

#### Filtru de Carbon

Filtru de carbon rotund Ø170 mm  
- Tip 6 (optional)

#### Distanta minima

Plita cu gaz: 61 cm  
Plita electrica: 52 cm

### AMBALARE: GREUTATE SI VOLUM

#### Greutate bruta

43 kg

#### Greutate neta

37 kg

#### Volum

0.39 m<sup>3</sup>

#### Dimensiuni ambalaj

Lungime

1035 mm

Inaltime

510 mm

Adancime

740 mm

### CARACTERISTICI CONSUM SI CONEXIUNE

#### Consum maxim

280 W

#### Curent

220-240V

#### Frecventa

50-60Hz

#### Tip stecher

Shuko

### FISA TEHNICA MOTOR

#### Capacitate maxima

670 m<sup>3</sup>/h

I.E.C. 61591

#### Nivel de zgomot maxim

67 dB(A)re1pW

I.E.C.60704-2-13

#### Presiune maxima (Pa)


500 Pa

#### Putere maxima motor

215 W

### CLASA DE ENERGIE

B



## ALTAIR TOP

### Versiune

Insula 60 cm - 800 m<sup>3</sup>/h

### Colectie

Fasteel

### Cod EAN

8034122204567

## FISA TEHNICA MOTOR

Viteza motorului	1	2	3	4
Nivel de zgomot dB(A)re1pW-I.E.C.60704-2-13	49	55	61	67
Capacitate (m <sup>3</sup> /h) I.E.C.61591	270	360	470	670
Presiune maxima (Pa)	390	420	460	500
Putere motor (W)	134	156	180	215
Evacuare aer	150	150	150	150

## CAPACITATE/ PRESIUNE



## ALTAIR TOP

### Versiune

Insula 60 cm - 800 m3/h


### Colectie

Fasteel

### Cod EAN

8034122204567

## ETICHETA DE ENERGIE

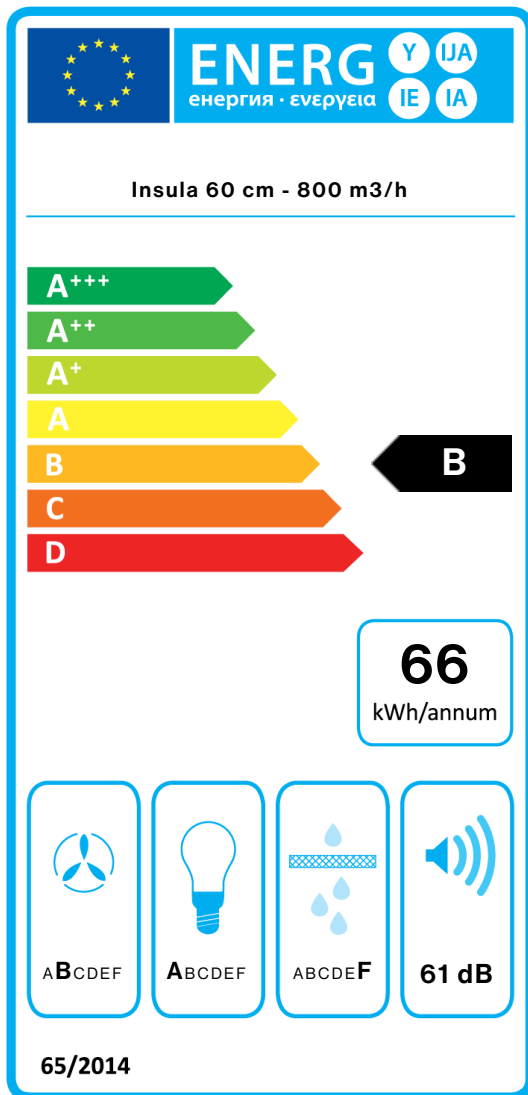

PF		
S	Falmec Spa	
M	Insula 60 cm - 800 m3/h	
AEC	65,6	kWh/a
EEC	B	
FDE	25,5	
FDEC	B	
LE	28,4	
LEC	A	
GFE	53,0	
GFEC	F	
Qmin	270,0	m <sup>3</sup> /h
Qmax	470,0	m <sup>3</sup> /h
Qboost	670,0	m <sup>3</sup> /h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	1,1	
EEl	64,8	
Qbep	333,0	m <sup>3</sup> /h
Pbep	407	Pa
Qboost	670,0	m <sup>3</sup> /h
Wbep	147,7	W
WL	8,60	W
Emiddle	245	lex
Lwa-SPEmax	61	dBa