

STREAM

Versiune

Perete 90 cm - 800 m³/h

Colectie

Design

Cod EAN

8034122331317



Fotografie cu caracter strict orientativ
Aceasta poate sa nu corespunda versiunii selectate

CARACTERISTICI

Inox AISI 304 Scotch Brite
Control electronic
Iluminare cu LED
Filtru de aer Air Falmec pentru aspiratie echilibrata
Filtru de carbon inclus

ACCESORII OPTIONALE

KACL.510#I

Extensie H700 - Perete

KACL.512#I

Extensie H960 - Perete

KACL.770#41F

Motor de acoperis 1100 m³/h
Brushless

KACL.786#41F

Motor de exterior 1000 m³/h

KACL.796#4AF

Motor de exterior 1500 m³/h

KACL.797#4AF

Motor de acoperis 1300 m³/h

KACL.798#41F

Motor de acoperis 950 m³/h

KACL.815

Lavete pentru curatare inox
(cutie 10 buc)

CARACTERISTICI TEHNICE

Tip de instalare

De perete

Dimensiuni

90 cm

Finisaj

Inox Scotch Brite (AISI 304)

Motor

800 m³/h

Tipul panoului de control

Touch control

Setari de viteza

4

Iluminare

LED 2x1,2 W - 3200 K

Filtru

3 x Filtru metalic "Air Falmec" -
Perete 278x301 mm

Filtru de Carbon

Filtru de carbon rectangular -
Tip 3 (optional)

Distanta minima

Plita cu gaz: 63 cm

Plita electrica: 52 cm

AMBALARE: GREUTATE SI VOLUM

Greutate bruta

22 kg

Greutate neta

17 kg

Volum

0.25 m³

Dimensiuni ambalaj

Lungime

995 mm

Inaltime

430 mm

Adancime

595 mm

CARACTERISTICI CONSUM SI CONEXIUNE

Consum maxim

280 W

Curent

220-240V

Frecventa

50-60Hz

Tip stecher

Shuko

FISA TEHNICA MOTOR

Capacitate maxima

680 m³/h

I.E.C. 61591

Nivel de zgomot maxim

68 dB(A)re1pW

I.E.C.60704-2-13

Presiune maxima (Pa)


500 Pa

Putere maxima motor

215 W

CLASA DE ENERGIE

B



STREAM

Versiune

Perete 90 cm - 800 m³/h

Colectie

Design

Cod EAN

8034122331317

FISA TEHNICA MOTOR

| Viteza motorului | 1 | 2 | 3 | 4 |
|--|-----|-----|-----|-----|
| Nivel de zgomot dB(A)re1pW-I.E.C.60704-2-13 | 49 | 56 | 62 | 68 |
| Capacitate (m ³ /h) I.E.C.61591 | 280 | 370 | 480 | 680 |
| Presiune maxima (Pa) | 390 | 420 | 480 | 500 |
| Putere motor (W) | 132 | 153 | 175 | 215 |
| Evacuare aer | 150 | 150 | 150 | 150 |

CAPACITATE/ PRESIUNE



STREAM

Versiune

Perete 90 cm - 800 m³/h


Colectie

Design

Cod EAN

8034122331317

ETICHETA DE ENERGIE

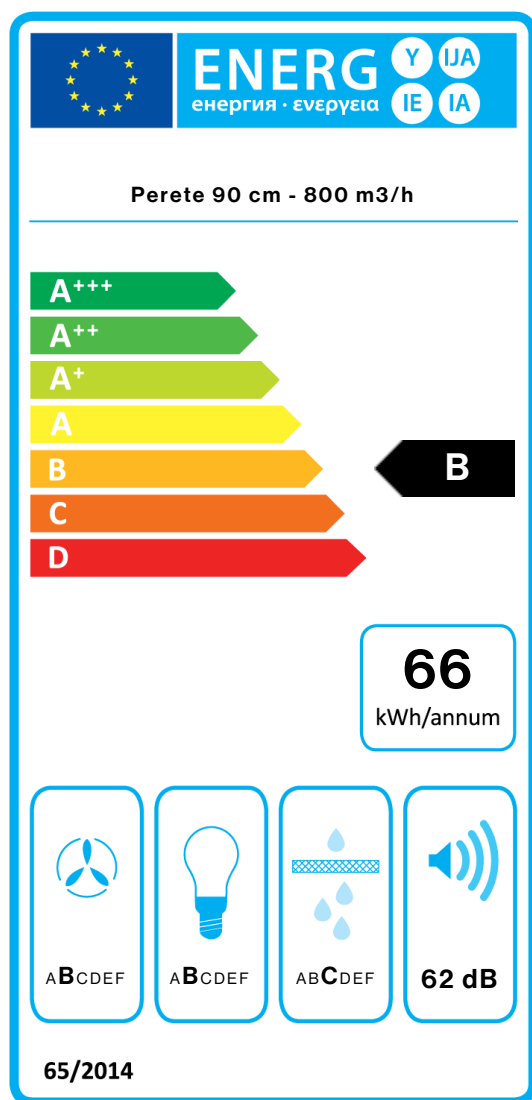

| PF | | |
|------------|--------------------------------------|-------------------|
| S | Falmec Spa | |
| M | Perete 90 cm - 800 m ³ /h | |
| AEC | 66,1 | kWh/a |
| EEC | B | |
| FDE | 26,3 | |
| FDEC | B | |
| LE | 20,5 | |
| LEC | B | |
| GFE | 80,0 | |
| GFEC | C | |
| Qmin | 280,0 | m ³ /h |
| Qmax | 480,0 | m ³ /h |
| Qboost | 680,0 | m ³ /h |
| SPEmin | 49 | dBa |
| SPEmax | 62 | dBa |
| SPEboost | 68 | dBa |
| PO | - | W |
| PS | 0,48 | W |
| PI | | |
| F | 1,1 | |
| EEI | 63,9 | |
| Qbep | 382,0 | m ³ /h |
| Pbep | 384 | Pa |
| Qboost | 680,0 | m ³ /h |
| Wbep | 155,1 | W |
| WL | 5,30 | W |
| Emiddle | 109 | lex |
| Lwa-SPEmax | 62 | dBa |