

ELLITTICA

Versiune

Insula 70 cm - 800 m³/h

Colectie

Design+

Cod EAN

8034122306841



Fotografie cu caracter strict orientativ
Aceasta poate sa nu corespunda versiunii selectate

CARACTERISTICI

Aspiratie perimetrala
Control electronic
Iluminare cu neon
Filtru de grasime metalic,
detasabil si lavabil
Filtru de carbon inclus

ACCESORII OPTIONALE

KACL.770#41F

Motor de acoperis 1100 m³/h
Brushless

KACL.786#41F

Motor de exterior 1000 m³/h

KACL.796#4AF

Motor de exterior 1500 m³/h

KACL.797#4AF

Motor de acoperis 1300 m³/h

KACL.798#41F

Motor de acoperis 950 m³/h

CARACTERISTICI TEHNICE

Tip de instalare

Insula

Dimensiuni

70 cm

Finisaj

Sticla transparenta tratata
termic gravata

Inox AISI 304 Scotch Brite cu

finisaj lucios in partea inferioara

Motor

800 m³/h

Tipul panoului de control

Control electronic

Setari de viteza

4

Iluminare

Neon 2x8 W

Filtru

2 x Filtru metalic "Air Falmec" -
Perete 278x301 mm

Filtru de Carbon

Filtru de carbon rotund Ø170 mm
- Tip 6 (inclus)

Distanta minima

Plita cu gaz: 63 cm

Plita electrica: 52 cm

AMBALARE: GREUTATE SI VOLUM

Greutate bruta

46 kg

Greutate neta

39 kg

Volum

0.75 m³

Dimensiuni ambalaj

Lungime

1070 mm

Inaltime

810 mm

Adancime

870 mm

CARACTERISTICI CONSUM SI CONEXIUNE

Consum maxim

320 W

Curent

220-240V

Frecventa

50-60Hz

Tip stecher

Shuko

FISA TEHNICA MOTOR

Capacitate maxima

700 m³/h

I.E.C. 61591

Nivel de zgomot maxim

65 dB(A)re1pW

I.E.C.60704-2-13

Presiune maxima (Pa)


510 Pa

Putere maxima motor

224 W

CLASA DE ENERGIE

B



ELLITTICA

Versiune

Insula 70 cm - 800 m³/h

Colectie

Design+


Cod EAN

8034122306841

FISA TEHNICA MOTOR

Viteza motorului	1	2	3	4
Nivel de zgomot dB(A)re1pW-I.E.C.60704-2-13	45	52	57	65
Capacitate (m ³ /h) I.E.C.61591	270	370	470	700
Presiune maxima (Pa)	390	440	490	510
Putere motor (W)	130	150	178	224
Evacuare aer	150	150	150	150

CAPACITATE/ PRESIUNE

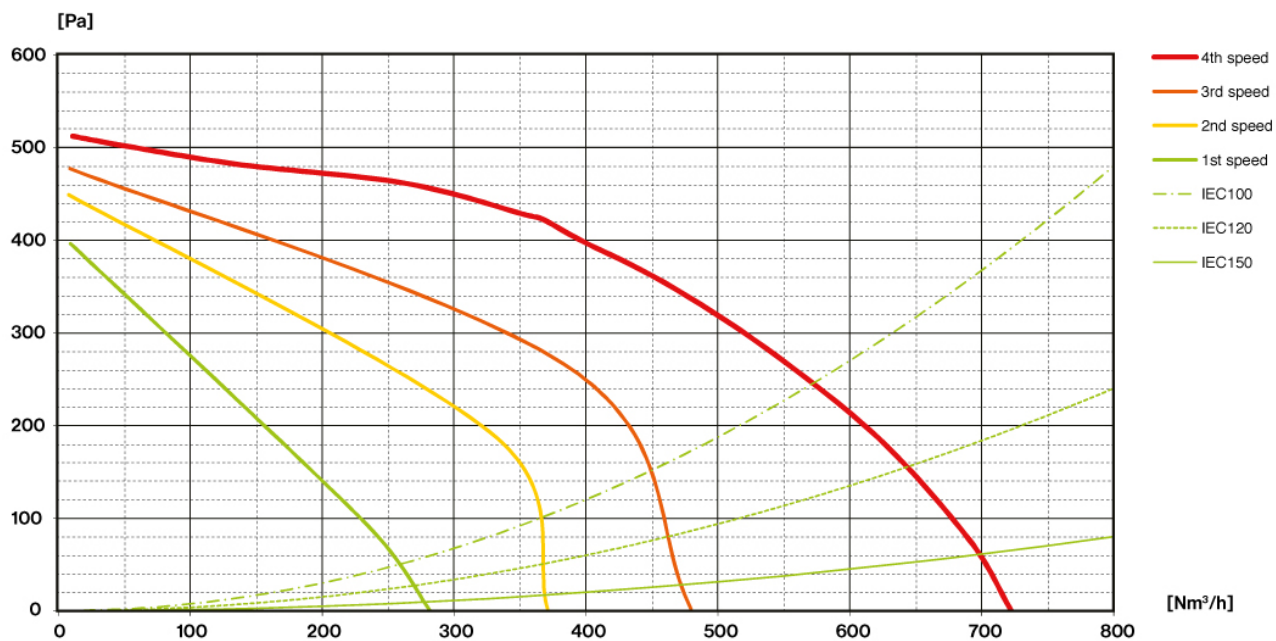

ELLITTICA

Versiune

Insula 70 cm - 800 m3/h


Colectie

Design+

Cod EAN

8034122306841

ETICHETA DE ENERGIE

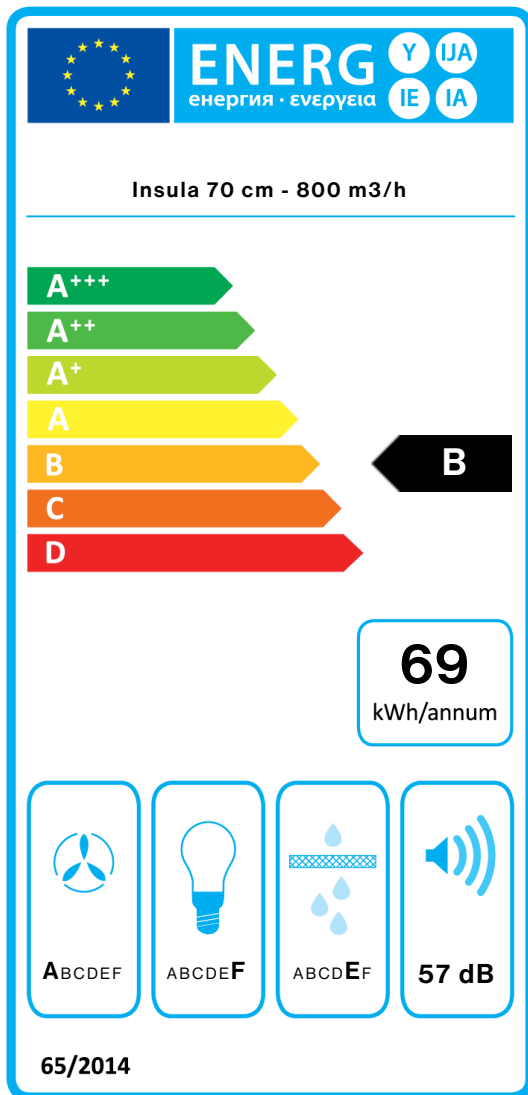

PF		
S	Falmec Spa	
M	Insula 70 cm - 800 m3/h	
AEC	68,8	kWh/a
EEC	B	
FDE	28,1	
FDEC	A	
LE	5,2	
LEC	F	
GFE	62,0	
GFEC	E	
Qmin	270,0	m ³ /h
Qmax	470,0	m ³ /h
Qboost	700,0	m ³ /h
SPEmin	45	dBa
SPEmax	57	dBa
SPEboost	65	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEl	63,0	
Qbep	366,0	m ³ /h
Pbep	423	Pa
Qboost	700,0	m ³ /h
Wbep	153,0	W
WL	17,80	W
Emiddle	93	lex
Lwa-SPEmax	57	dBa