

STELLA

Versiune

Motor de acoperis 950 m³/h

Colectie

Design+

Cod EAN

8034122348971



Fotografie cu caracter strict orientativ
Aceasta poate sa nu corespunda versiunii selectate

CARACTERISTICI

Control electronic
Filtru de grasime metalic, detasabil si lavabil
Telecomanda inclusa
Dynamic LED Light (2700K - 5600K)
Motor sold separately

Dimensiune decupaj: 505x1240 mm

ACCESORII OPTIONALE

KACL.770#41F
Motor de acoperis 1100 m³/h
Brushless

KACL.782#49F
Motor Slim 800 m³/h

KACL.786#41F
Motor de exterior 1000 m³/h

KACL.796#4AF
Motor de exterior 1500 m³/h

KACL.797#4AF
Motor de acoperis 1300 m³/h

KACL.815
Lavete pentru curatare inox (cutie 10 buc)

KACL.939#BF
Kit de filtrare pentru verisunea recirculare in plafon (doar pentru Motorul Slim)

CARACTERISTICI TEHNICE

Tip de instalare
De plafon

Dimensiuni
120 cm

Finisaj
Inox Scotch Brite (AISI 304)

Tipul panoului de control
Control electronic

Setari de viteza
4

Iluminare
Led 4x3,6 W - 2700 K / 5600 K

Filtru
3 x Filtru metalic "Base" - 290x326 mm

AMBALARE: GREUTATE SI VOLUM

STELLA Greutate bruta

29.4 kg

Greutate neta

25.9 kg

Volum

0.18 m³

Dimensiuni ambalaj

Lungime

1420 mm

Inaltime

190 mm

Adancime

670 mm

TELECOMANDA Motor de acoperis 950 m³/h Greutate bruta

10 kg

Greutate neta

9 kg

Volum

0.06 m³

Dimensiuni ambalaj

Lungime

435 mm

Inaltime

340 mm

Adancime

385 mm

CARACTERISTICI CONSUM SI CONEXIUNE

Consum maxim

30 W

Curent

220-240V

Frecventa

50-60Hz

Tip stecher

Shuko

FISA TEHNICA MOTOR

Capacitate maxima

830 m³/h

I.E.C. 61591

Nivel de zgomot maxim

68 dB(A)re1pW

I.E.C.60704-2-13

Presiune maxima (Pa)

580 Pa

Putere maxima motor

270 W

CLASA DE ENERGIE

B

STELLA

Versiune

Motor de acoperis 950 m³/h

Colectie

Design+


Cod EAN

8034122348971

FISA TEHNICA MOTOR

Viteza motorului	1	2	3	4
Nivel de zgomot dB(A)re1pW-I.E.C.60704-2-13	50	57	64	68
Capacitate (m ³ /h) I.E.C.61591	360	480	630	830
Presiune maxima (Pa)	480	520	560	580
Putere motor (W)	190	220	250	270
Evacuare aer	150	150	150	150

CAPACITATE/ PRESIUNE

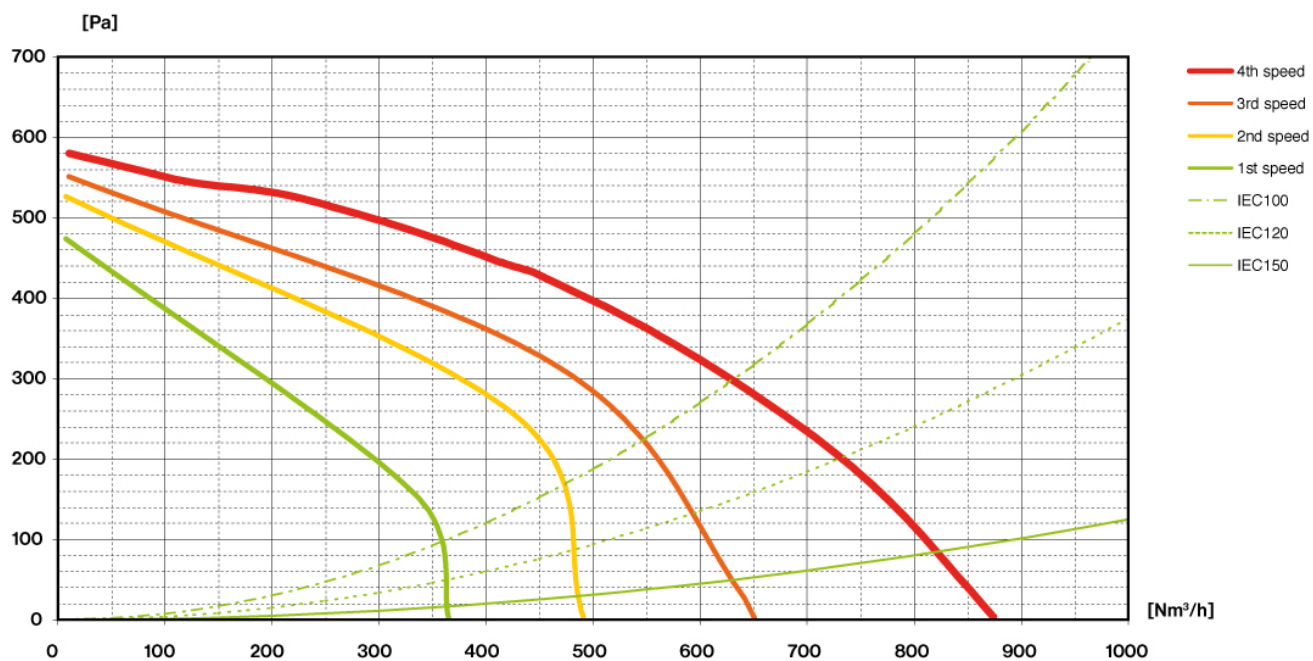

STELLA

Versiune

Motor de acoperis 950 m³/h


Colectie

Design+

Cod EAN

8034122348971

ETICHETA DE ENERGIE

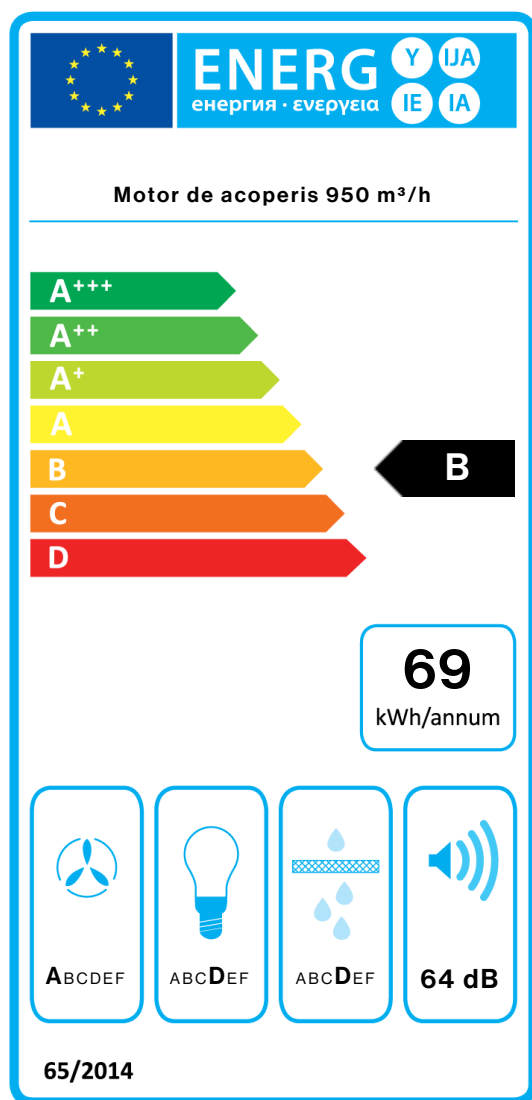

PF		
S	Falmec Spa	
M	Motor de acoperis 950 m ³ /h	
AEC	69,0	kWh/a
EEC	B	
FDE	29,5	
FDEC	A	
LE	22,9	
LEC	D	
GFE	65,1	
GFEC	D	
Qmin	360,0	m ³ /h
Qmax	630,0	m ³ /h
Qboost	830,0	m ³ /h
SPEmin	50	dBa
SPEmax	64	dBa
SPEboost	58	dBa
PO	-	W
PS	0,48	W
PI		
F	0,9	
EEl	56,7	
Qbep	441,0	m ³ /h
Pbep	434	Pa
Qboost	830,0	m ³ /h
Wbep	180,0	W
WL	13,50	W
Emiddle	309	lex
Lwa-SPEmax	64	dBa