

DOWN DRAFT

Versiune

Motor Slim 800 m³/h

Colectie

Design+

Cod EAN

8034122348582



Fotografie cu caracter strict orientativ
Aceasta poate sa nu corespunda versiunii selectate

CARACTERISTICI

Aspiratie perimetrala

Touch control + functia 24 h

Iluminare cu LED

Filtru de grasime Top, detasabil si lavabil

Optional - telecomanda

ACCESORII OPTIONALE

KACL.815

Lavete pentru curatare inox (cutie 10 buc)

105080053

Telecomanda

CARACTERISTICI TEHNICE

Tip de instalare

De blat

Dimensiuni

120 cm

Finisaj

Inox Scotch Brite (AISI 304)

Tipul panoului de control

Touch control

Setari de viteza

4

Iluminare

Banda cu LED

Lumina ambientala

Banda cu LED

Filtru

2 x Filtru metalic "Top" - 404x216 mm

Filtru de Carbon

Filtru Carbon.Zeo Mic (optional)

AMBALARE: GREUTATE SI VOLUM

DOWN DRAFT Greutate bruta

52.6 kg

Greutate neta

43.2 kg

Volum

0.43 m³

Dimensiuni ambalaj

Lungime

1395 mm

Inaltime

355 mm

Adancime

865 mm

TELECOMANDA Motor Slim

800 m³/h Greutate bruta

10.3 kg

Greutate neta

9 kg

Volum

0.07 m³

Dimensiuni ambalaj

Lungime

515 mm

Inaltime

440 mm

Adancime

320 mm

CARACTERISTICI CONSUM SI CONEXIUNE

Consum maxim

30 W

Curent

220-240V

Frecventa

50-60Hz

Tip stecher

Shuko

FISA TEHNICA MOTOR

Capacitate maxima

620 m³/h

I.E.C. 61591

Nivel de zgomot maxim

67 dB(A)re1pW

I.E.C.60704-2-13

Presiune maxima (Pa)



400 Pa

Putere maxima motor

270 W

CLASA DE ENERGIE

C



DOWN DRAFT

Versiune

Motor Slim 800 m³/h

Colectie

Design+


Cod EAN

8034122348582

FISA TEHNICA MOTOR

Viteza motorului	1	2	3	4
Nivel de zgomot dB(A)re1pW- I.E.C.60704-2-13	52	57	64	67
Capacitate (m ³ /h) I.E.C.61591	325	330	550	620
Presiune maxima (Pa)	450	500	400	400
Putere motor (W)	200	230	240	270
Evacuare aer	220x90	220x90	220x90	220x90

CAPACITATE/ PRESIUNE

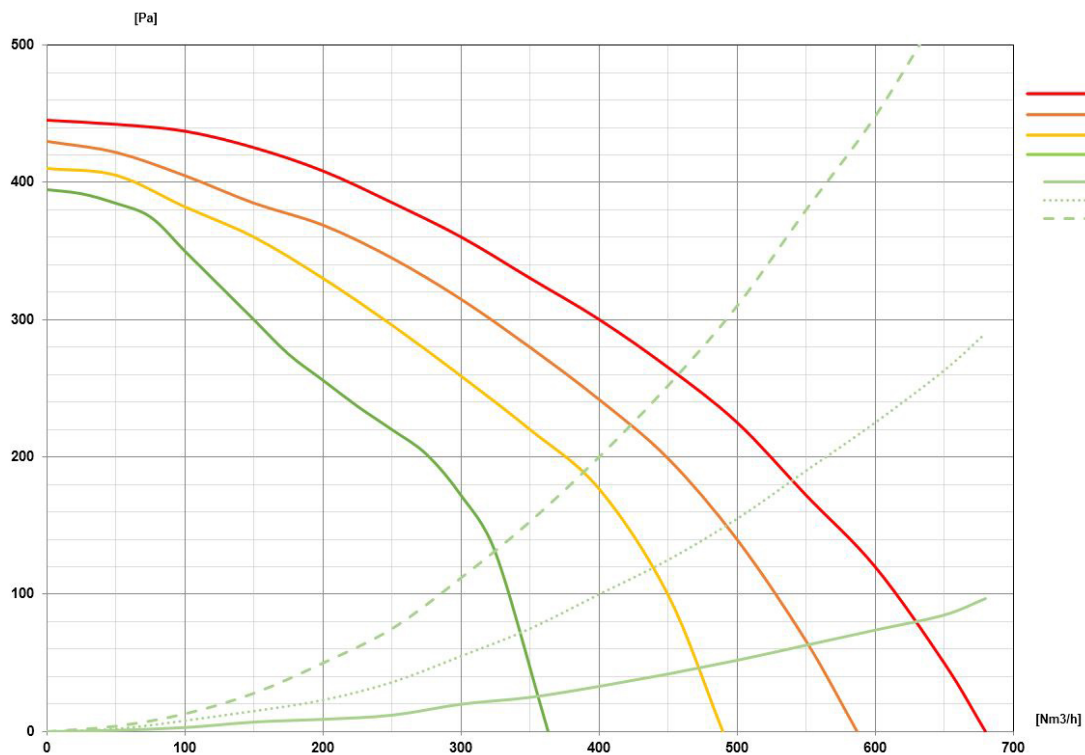

DOWN DRAFT

Versiune

Motor Slim 800 m³/h


Colectie

Design+

Cod EAN

8034122348582

ETICHETA DE ENERGIE

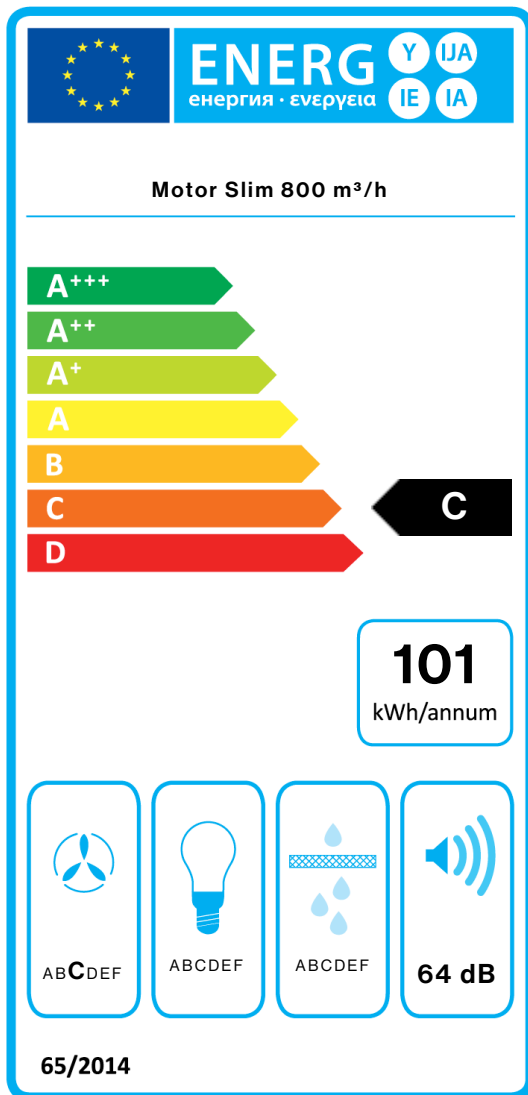

PF		
S	Falmec Spa	
M	Motor Slim 800 m ³ /h	
AEC	100,6	kWh/a
EEC	C	
FDE	19,3	
FDEC	C	
LE	2,4	
LEC	G	
GFE	36,0	
GFEC	G	
Qmin	325,0	m ³ /h
Qmax	550,0	m ³ /h
Qboost	620,0	m ³ /h
SPEmin	52	dBa
SPEmax	64	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	1.3	
EEl	91,0	
Qbep	440,0	m ³ /h
Pbep	271	Pa
Qboost	620,0	m ³ /h
Wbep	172,0	W
WL	26,00	W
Emiddle	63	lex
Lwa-SPEmax	64	dBa