

## DOWN DRAFT

### Versiune

Motor de acoperis 950 m<sup>3</sup>/h

### Colectie

Design+

### Cod EAN

8034122348100



Fotografie cu caracter strict orientativ  
Aceasta poate sa nu corespunda versiunii selectate

## CARACTERISTICI

### Aspiratie perimetrala

Touch control + functia 24 h

Filtru de grasime Top, detasabil  
si lavabil

Optional - filtru combinat

Carbon.Zeo, regenerabil

Optional - telecomanda

## ACCESORII OPTIONALE

### KACL.815

Lavete pentru curatare inox  
(cutie 10 buc)

### KACL.930

Filtru Carbon.Zeo Mic

### 105080053

Telecomanda

## CARACTERISTICI TEHNICE

### Tip de instalare

De blat

### Dimensiuni

90 cm

### Finisaj

Inox Scotch Brite (AISI 304)

Sticla tratata termic culoare  
neagra

### Tipul panoului de control

Touch control

### Setari de viteza

4

### Iluminare

Banda cu LED

### Filtru

2 x Filtru metalic "Top" - 254x216  
mm

### Filtru de Carbon

Filtru Carbon.Zeo Mic (optional)

## AMBALARE: GREUTATE SI VOLUM

### DOWN DRAFT Greutate bruta

44 kg

### Greutate neta

37 kg

### Volum

0.34 m<sup>3</sup>

### Dimensiuni ambalaj

Lungime

1070 mm

Inaltime

370 mm

Adancime

870 mm

### TELECOMANDA Motor de acoperis 950 m<sup>3</sup>/h Greutate bruta

10 kg

### Greutate neta

9 kg

### Volum

0.06 m<sup>3</sup>

### Dimensiuni ambalaj

Lungime

435 mm

Inaltime

340 mm

Adancime

385 mm

## CARACTERISTICI CONSUM SI CONEXIUNE

### Consum maxim

30 W

### Curent

220-240V

### Frecventa

50-60Hz

### Tip stecher

Shuko

## FISA TEHNICA MOTOR

### Capacitate maxima

730 m<sup>3</sup>/h

I.E.C. 61591

### Nivel de zgomot maxim

68 dB(A)re1pW

I.E.C.60704-2-13

### Presiune maxima (Pa)

580 Pa

### Putere maxima motor

240 W

## CLASA DE ENERGIE

B

## DOWN DRAFT

### Versiune

Motor de acoperis 950 m<sup>3</sup>/h

### Colectie

Design+


### Cod EAN

8034122348100

## FISA TEHNICA MOTOR

Viteza motorului	1	2	3	4
Nivel de zgomot dB(A)re1pW-I.E.C.60704-2-13	51	59	64	68
Capacitate (m <sup>3</sup> /h) I.E.C.61591	330	480	610	730
Presiune maxima (Pa)	460	520	560	580
Putere motor (W)	187	210	225	240
Evacuare aer	150	150	150	150

## CAPACITATE/ PRESIUNE

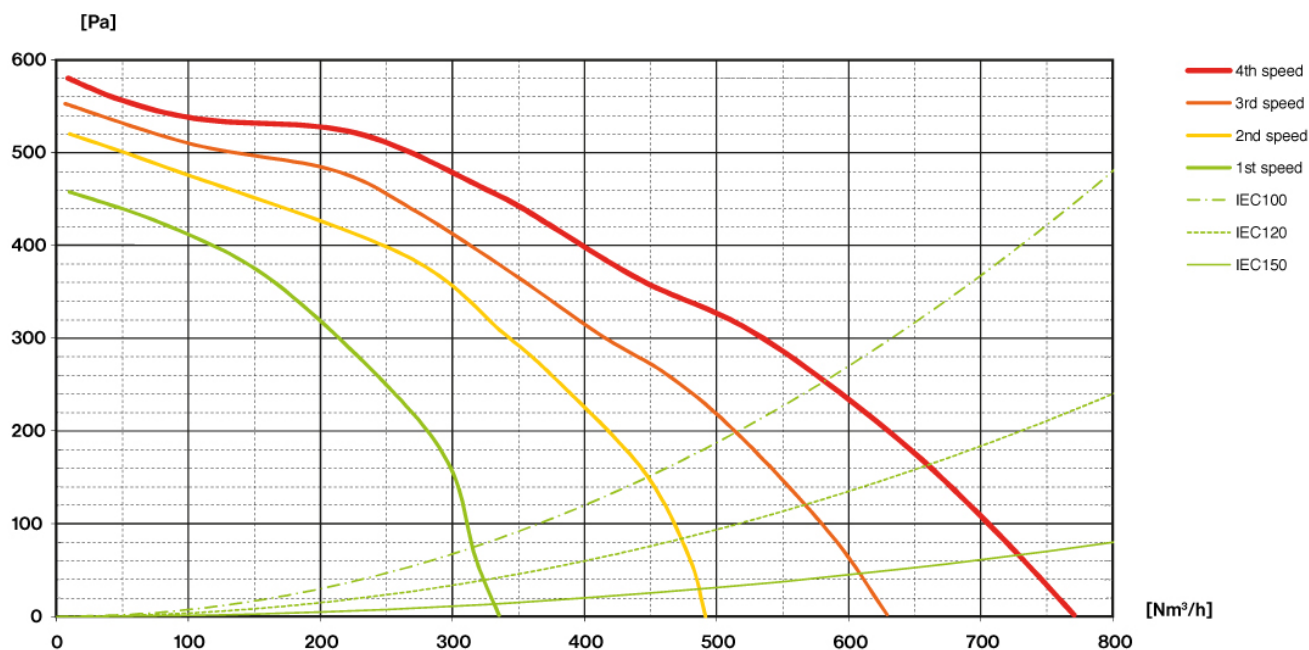

## DOWN DRAFT

### Versiune

Motor de acoperis 950 m<sup>3</sup>/h


### Colectie

Design+

### Cod EAN

8034122348100

## ETICHETA DE ENERGIE

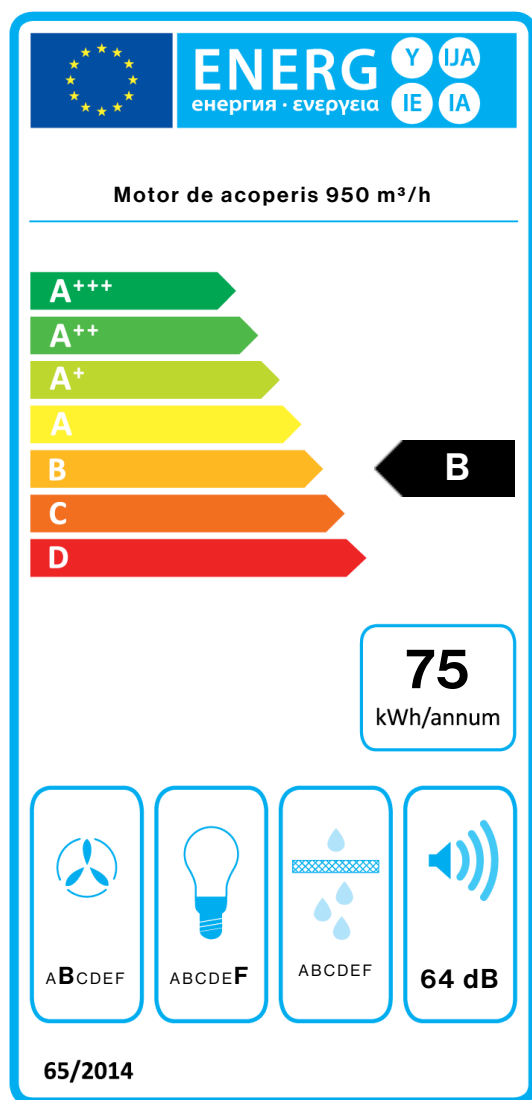

PF		
S	Falmec Spa	
M	Motor de acoperis 950 m <sup>3</sup> /h	
AEC	75,4	kWh/a
EEC	B	
FDE	24,6	
FDEC	B	
LE	6,5	
LEC	F	
GFE	36,0	
GFEC	G	
Qmin	330,0	m <sup>3</sup> /h
Qmax	610,0	m <sup>3</sup> /h
Qboost	730,0	m <sup>3</sup> /h
SPEmin	51	dBa
SPEmax	64	dBa
SPEboost	68	dBa
PO	-	W
PS	0,95	W
PI		
F	1,1	
EEl	65,2	
Qbep	369,0	m <sup>3</sup> /h
Pbep	422	Pa
Qboost	730,0	m <sup>3</sup> /h
Wbep	176,0	W
WL	6,50	W
Emiddle	42	lex
Lwa-SPEmax	64	dBa