

ALBA

Version

Remote under-roof motor 950 m³/h

Collection

Design+

EAN code

8034122359526



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

- Perimeter suction
- Electronic control
- Metallic grease filter, removable and washable
- Remote control included
- Perimeter Led Lighting
- Glass perimeter frame
- Matte white painted panel
- Possibility of painting the panel

OPTIONAL ACCESSORIES

- KACL.770#41F**
Remote under-roof 1100 m3/h
Brushless
- KACL.782#49F**
Slim motor 800 m3/h
- KACL.786#41F**
Outdoor extractor fan 1000 m3/h
- KACL.796#4AF**
Outdoor extractor fan 1500 m3/h
- KACL.797#4AF**
Remote under-roof motor 1300 m3/h
- KACL.798#41F**
Remote under-roof motor 950 m3/h
- KACL.928**
Filters spare
- KACL.931**
Filters Carbon.Zeo - Spare
- KACL.939#BF**
Ceiling re-circulation filtering kit (only for Slim Motor)
- KACL.953#BF**
Carbon.Zeo vertical outlet ceiling filter unit kit

TECHNICAL FEATURES

- Installation type
Ceiling
- Dimensions
120 cm
- Finishing
Tempered glass
- Type of control
Electronic control
- Speed settings
4
- Lighting
LED (4000 K)
- Maximum distance
Gas hob: 150 cm
Electric hob: 150 cm

PACKAGING:WEIGHTS AND VOLUMES


- ALBA Gross weight**
52.2 kg
- Net weight**
45.2 kg
- Volumes**
0.37 m³
- Packaging size**
Length
1395 mm
Height
310 mm
Depth
865 mm
- REMOTE MOTOR** Remote under-roof motor 950 m³/h
- Gross weight**
10 kg
- Net weight**
9 kg
- Volumes**
0.06 m³
- Packaging size**
Length
435 mm
Height
340 mm
Depth
385 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption**
90 W
- Voltage**
220-240V
- Frequency**
50-60Hz

MOTOR TECHNICAL SHEET

- Maximum capacity**
830 m³/h
I.E.C. 61591
- Maximum noise level**
68 dB(A)re1pW
I.E.C.60704-2-13
- Maximum pressure (Pa)**
580 Pa
- Max. motor power**
270 W
- ENERGY CLASS**
C

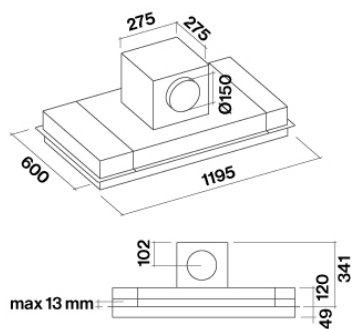

Hood and motor dimensions

ALBA

Version

Remote under-roof motor 950
m³/h

Collection

Design+


EAN code

8034122359526

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	50	57	64	68
Capacity (m3/h) I.E.C.61591	360	480	630	830
Maximum pressure (Pa)	480	520	560	580
Motor Power (W)	190	220	250	270
Air outlet	150	150	150	150

CAPACITY / PRESSURE

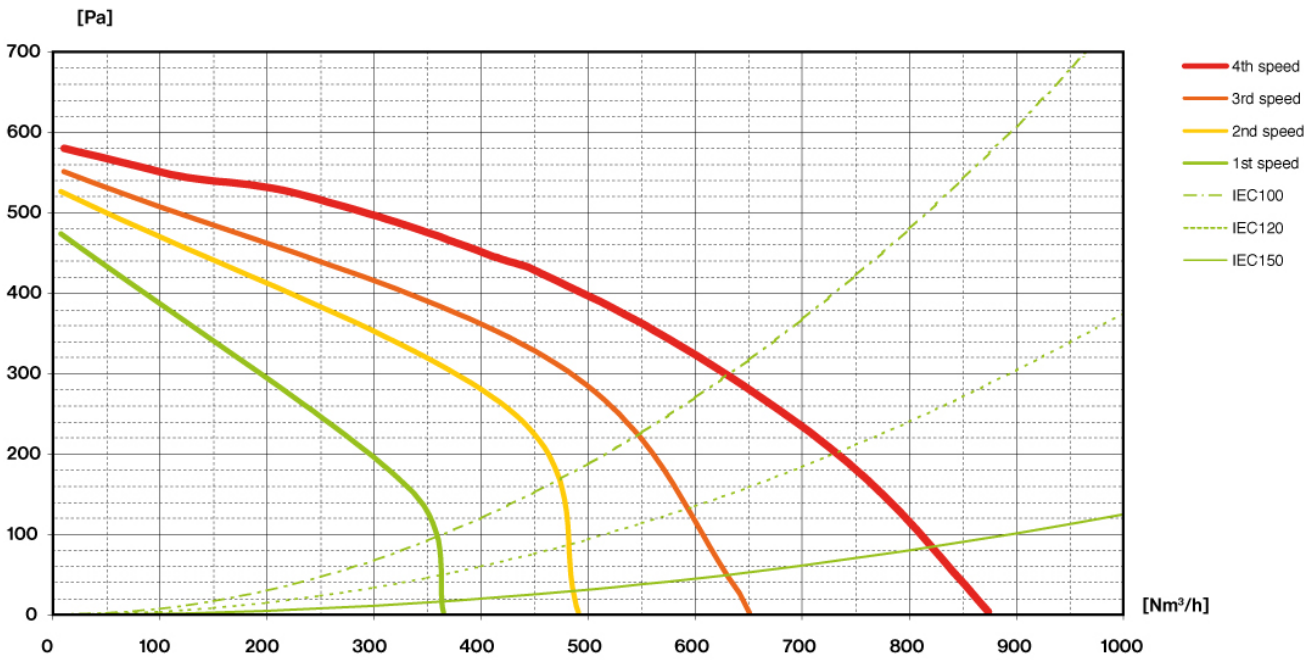


ALBA

Version
Remote under-roof motor 950
m³/h

Collection
Design+

EAN code
8034122359526

ENERGY LABEL

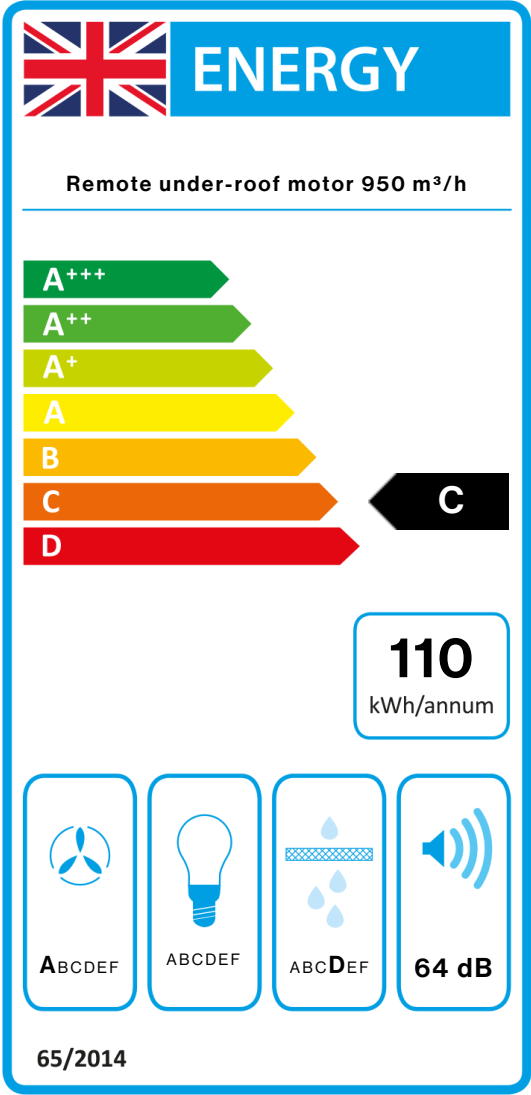

PF		
S	Falmec Spa	
M	Remote under-roof motor 950 m³/h	
AEC	110,2	kWh/a
EEC	C	
FDE	29,5	
FDEC	A	
LE	4,0	
LEC	G	
GFE	65,1	
GFEC	D	
Qmin	360,0	m³/h
Qmax	630,0	m³/h
Qboost	830,0	m³/h
SPEmin	50	dBa
SPEmax	64	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEL	72,1	
Qbep	441,0	m³/h
Pbep	434	Pa
Qboost	830,0	m³/h
Wbep	180,0	W
WL	70,00	W
Emiddle	277	lex
Lwa-SPEmax	64	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.