

PRESTIGE

Version

Island 75 cm - White - 800 m³ / h

Designer

Emo design

Awards

Reddot design award - winner 2010

Collection

Design+

EAN code

8034122342115



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

Scotch brite stainless steel (AISI 304)

Shaped glass and tempered white

Electronic control

LED ambient light

LED lighting

Top filter, removable and washable

Charcoal filter included

Possible to duct wall mounted from rear

OPTIONAL ACCESSORIES

KACL.553#I

Extension H1200 - Island

KACL.815

Protective cleaning cloths for stainless steel (box 10 pcs)

KACL.798#41F

Remote under-roof motor 950 m³/h

KACL.770#41F

Remote under-roof 1100 m³/h

Brushless

KACL.786#41F

Outdoor extractor fan 1000 m³/h

KACL.796#4AF

Outdoor extractor fan 1500 m³/h

KACL.797#4AF

Remote under-roof motor 1300 m³/h

TECHNICAL FEATURES

Installation type

Island

Dimensions

75 cm

Finishing

Scotch brite stainless steel (AISI 304)

Shaped glass and tempered white

Motor

800 m³/h

Type of control

Electronic control

Speed settings

4

Lighting

Led 4x1,2 W - 4200 K

Ambient lighting

Led strip 13 W - 4200 K

Filter

Metallic filter "Top" - 338x216 mm - 2 pz

Charcoal filter

Round charcoal filter Ø170 mm - Type 6

Minimum distance

Gas hob: 60 cm

Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

Gross weight

46.00 kg

Net weight

40.00 kg

Volume

0.68 m³

Packaging size

Length

1035 mm

Height

740 mm

Depth

890 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

280 W

Voltage / Frequency

220-240V

50-60Hz

Plug type

Shuko

MOTOR TECHNICAL SHEET

Maximum capacity

680 m³/h

I.E.C. 61591

Maximum noise level

68 dB(A)re1pW

I.E.C.60704-2-13

Maximum pressure (Pa)

510 Pa

Max. motor power

224 W

ENERGY CLASS

B

PRESTIGE

Version

Island 75 cm - White - 800 m³ / h

Designer

Emo design

Awards


Reddot design award - winner 2010

Collection

Design+

EAN code

8034122342115



PRESTIGE

Version

Island 75 cm - White - 800 m³ / h

Designer

Emo design

Awards

Reddot design award - winner 2010

Collection

Design+


EAN code

8034122342115

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	54	57	63	68
Capacity (m ³ /h) I.E.C.61591 Normalized Pipes	270	370	490	680
Maximum pressure (Pa)	390	440	490	510
Motor Power (W)	130	150	178	224
Air outlet	150	150	150	150

CAPACITY / PRESSURE

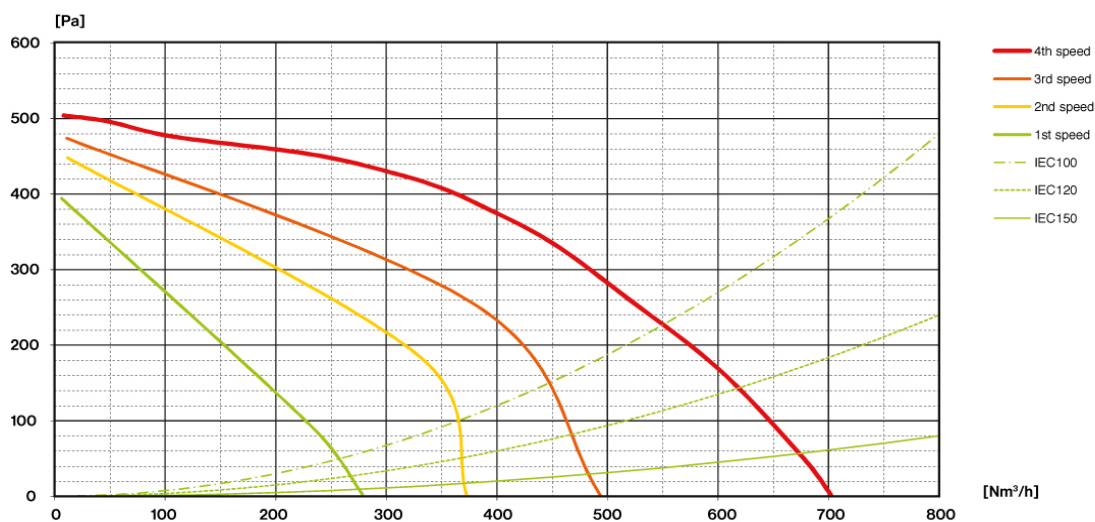

PRESTIGE

Version

Island 75 cm - White - 800 m³ / h

Designer

Emo design

Awards

Reddot design award - winner 2010


Collection

Design+

EAN code

8034122342115

ENERGY LABEL

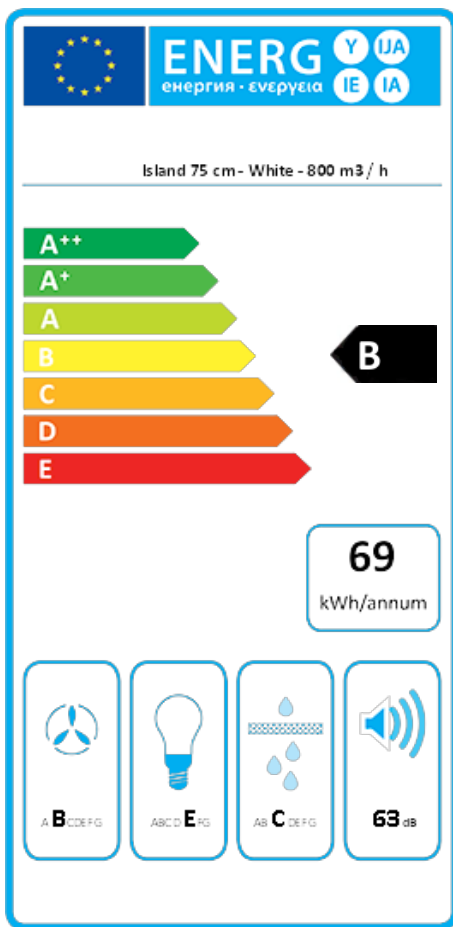

PF		
S	Falmec Spa	
M	Island 75 cm - White - 800 m ³ / h	
AEC	68,7	kWh/a
ECC	B	
FDE	26,6	
FDEC	B	
LE	9,4	
LEC	E	
GFE	79,0	
GFEC	C	
Qmin	270,0	m ³ /h
Qmax	490,0	m ³ /h
Qboost	680,0	m ³ /h
SPEmin	54	dBa
SPEmax	63	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W
PI		
F	1,0	
EEl	63,3	
Qbep	357,0	m ³ /h
Pbep	404	Pa
Qboost	680,0	m ³ /h
Wbep	150,6	W
WL	18,80	W
Emiddle	176	lux
Lwa-SPEmax	63	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.