

NUVOLA 140

Version

Slim motor 800 m³/h

Collection

Design+

EAN code

8034122363189



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

Perimeter suction
Electronic control
Metallic grease filter, removable and washable
Remote control included
Dynamic LED Light (2700K - 5600K)
Motor sold separately

Cut-out size: 590 x 1325 mm

OPTIONAL ACCESSORIES

KACL.396
Ø200 - Flange

KACL.398
Ø150 - Flange

KACL.770#41F
Remote under-roof 1100 m³/h
Brushless

KACL.782#49F
Slim motor 800 m³/h

KACL.786#41F
Outdoor extractor fan 1000 m³/h

KACL.796#4AF
Outdoor extractor fan 1500 m³/h

KACL.797#4AF
Remote under-roof motor 1300 m³/h

KACL.798#41F
Remote under-roof motor 950 m³/h

KACL.928
Filters spare

KACL.931
Filters Carbon.Zeo - Spare

KACL.939#BF
Ceiling re-circulation filtering kit (only for Slim Motor)

KACL.953#BF
Carbon.Zeo vertical outlet ceiling filter unit kit

TECHNICAL FEATURES

Installation type
Ceiling

Dimensions
140 cm

Finishing
Scotch brite stainless steel (AISI 304)

Type of control
Electronic control

Speed settings
4

Lighting
Led 4x11 W - 2700 K / 5600 K

Filter
4 x Metallic filter "Base" - 290x267 mm

Maximum distance
Gas hob: 150 cm
Electric hob: 150 cm

PACKAGING:WEIGHTS AND VOLUMES

NUVOLA 140 Gross weight
45.4 kg

Net weight
40.1 kg

Volumes
0.22 m³

Packaging size
Length
1455 mm
Height
210 mm
Depth
730 mm

REMOTE MOTOR Slim motor 800 m³/h Gross weight
6.5 kg

Net weight
5.2 kg

Volumes
0.04 m³

Packaging size
Length
575 mm
Height
195 mm
Depth
395 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
50 W

Voltage
220-240V

Frequency
50-60Hz

Plug type
Shuko

MOTOR TECHNICAL SHEET


Maximum capacity
540 m³/h
I.E.C. 61591

Maximum noise level
66 dB(A)re1pW
I.E.C.60704-2-13

Maximum pressure (Pa)
600 Pa

Max. motor power
150 W

ENERGY CLASS
C

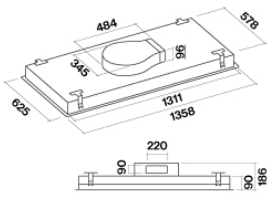

Nuvola Led 140 - slim motor

NUVOLA 140

Version

Slim motor 800 m³/h

Collection

Design+


EAN code

8034122363189

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW- I.E.C.60704-2-13	52	58	63	66
Capacity (m ³ /h) I.E.C.61591	245	350	470	540
Maximum pressure (Pa)	400	480	530	600
Motor Power (W)	100	110	120	150
Air outlet	220x90	220x90	220x90	220x90

CAPACITY / PRESSURE

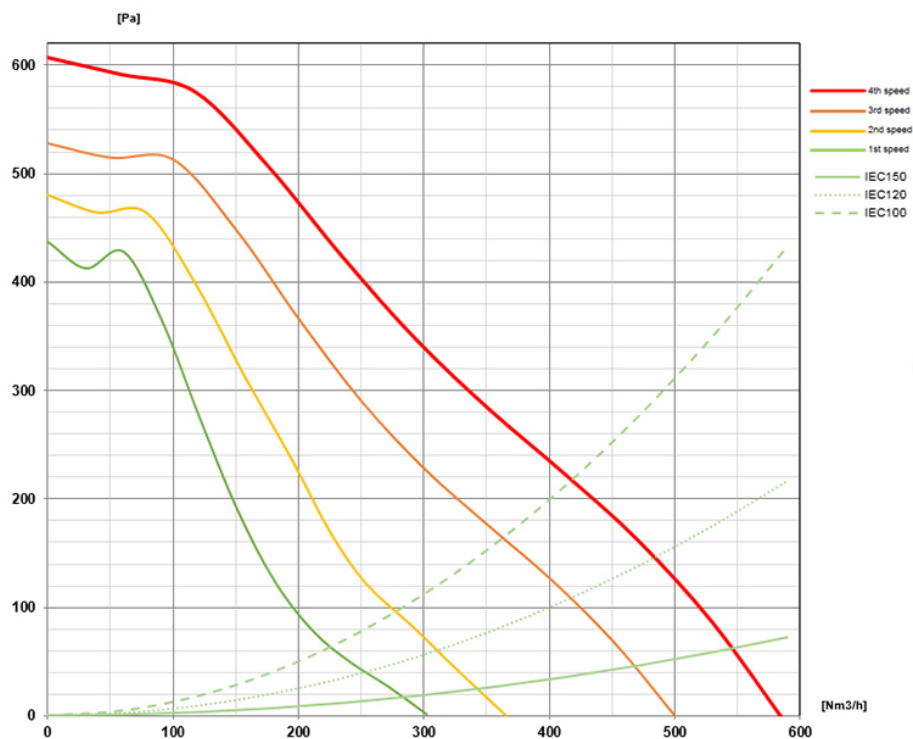

NUVOLA 140

Version

Slim motor 800 m³/h


Collection

Design+

EAN code

8034122363189

ENERGY LABEL

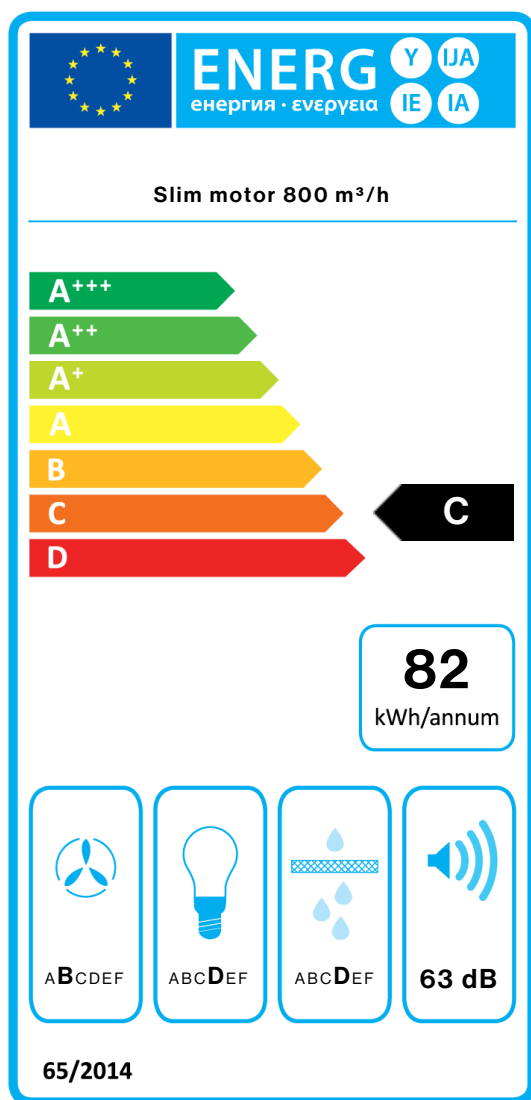

PF		
S	Falmec Spa	
M	Slim motor 800 m ³ /h	
AEC	81,9	kWh/a
EEC	C	
FDE	24,2	
FDEC	B	
LE	14,1	
LEC	D	
GFE	65,1	
GFEC	D	
Qmin	245,0	m ³ /h
Qmax	470,0	m ³ /h
Qboost	540,0	m ³ /h
SPEmin	52	dBa
SPEmax	63	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	1.1	
EEL	78,0	
Qbep	332,0	m ³ /h
Pbep	297	Pa
Qboost	540,0	m ³ /h
Wbep	113,0	W
WL	50,00	W
Emiddle	705	lux
Lwa-SPEmax	63	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.