

STREAM

01STR-90-VS Væg 90 cm - Stål
- 800 m³/h

Sortiment

Design

EAN Kode

8034122331317



Fotografiet er udelukkende informativt
Korresponderer ikke nødvendigvis tmed den valgte model

FUNKTIONER

Rustfrit stål (AISI 304) scotch brite
Elektronisk kontrolpanel
LED lys
TOP Vaskbare rustfrie fedtfilter
Kulfilter
Dæmpbart LED-lys
Dynamic LED Light (2700K - 5600K)

From 04.11.2024 the dynamic and dimmable light is included.

MULIGHEDER FOR TILVALG

07MAGIC

Beskyttende rensklude til rustfrit stål. Kasse med 10 klude

KACL.510#I

Forlænger H700 væg

KACL.512#I

Forlænger H960 væg

KACL.864

Air flow conveyer til recirkulation. Væghængte modeller.

TEKNISK BESKRIVELSE

Installation
Væg

Dimensioner
90 cm

Materiale
Scotch brite rustfrit stål (AISI 304)

Motor
800 m³/h

Betjening
Betjening med touch

Hastighed
3 + boost

Belysning
Led 2x1,2 W - 2700 K / 5600 K

Filter
3 x Metallic filter "Top" - Wall 278x301 mm

Kulfilter
Rektangulært kulfilter. Type 3 (Tilvalg)

Minimumsafstand
Gaskomfur: 63 cm
Kogeplade: 52 cm

EMBALLAGE: VÆGT OG VOLUMEN

Bruttovægt
22 kg

Nettovægt
17 kg

Volumen
0.25 m³

Mål på emballage

Længde
995 mm

Højde
430 mm

Dybde
595 mm

FORBRUG OG TILSLUTNINGSMULIGHEDER

Maksimalt forbrug
280 W

Spænding
220-240V

Frekvens
50-60Hz

Shuko

DATABLAD MOTOR


Maksimal kapacitet
680 m³/h
I.E.C. 61591

Maksimalt støjniveau
68 dB(A)_{re1pW}
I.E.C.60704-2-13

Maksimalt tryk (Pa)
500 Pa

Maksimal sugestyrke
215 W

ENERGIKLASSE
B



STREAM

01STR-90-VS Væg 90 cm - Stål
- 800 m³/h

Sortiment

Design


EAN Kode

8034122331317

DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A) _{re1pW-I.E.C.60704-2-13}	49	56	62	68
Kapacitet (m ³ /h) I.E.C.61591	280	370	480	680
Maksimalt tryk (Pa)	390	420	480	500
Forbrug (W)	132	153	175	215
Luftudtag	150	150	150	150

KAPACITET / TRYK

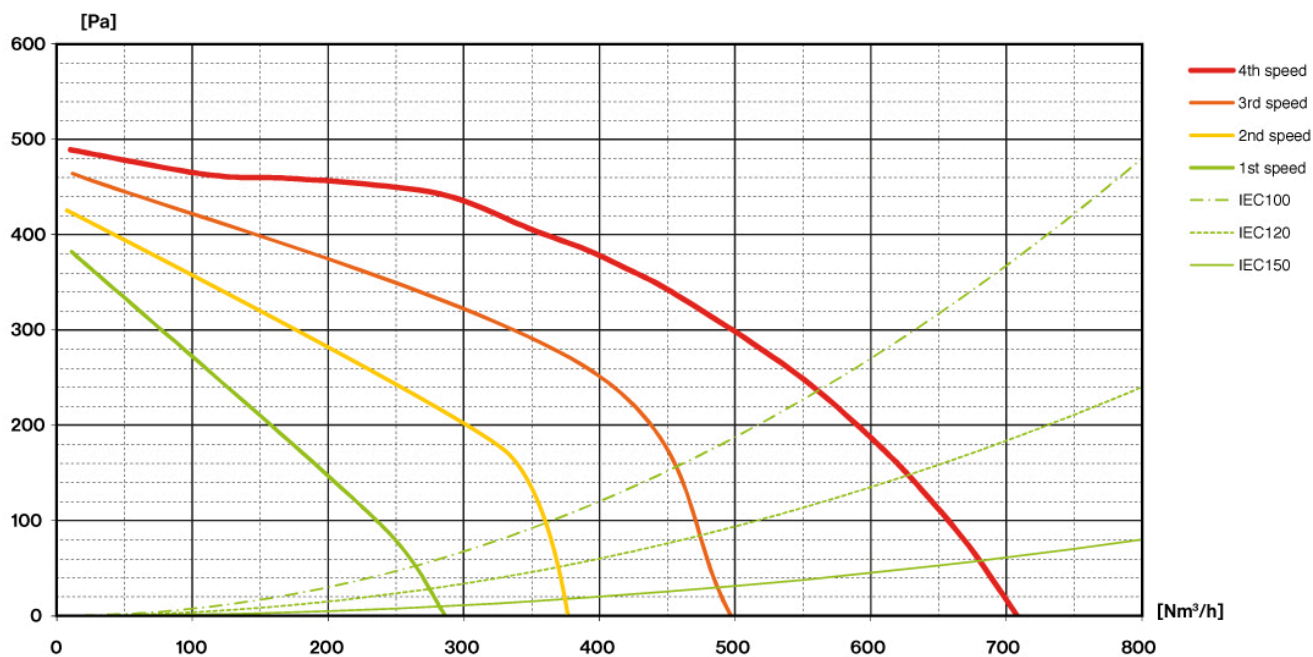

STREAM


01STR-90-VS Væg 90 cm - Stål
- 800 m³/h

Sortiment

Design

EAN Kode

8034122331317

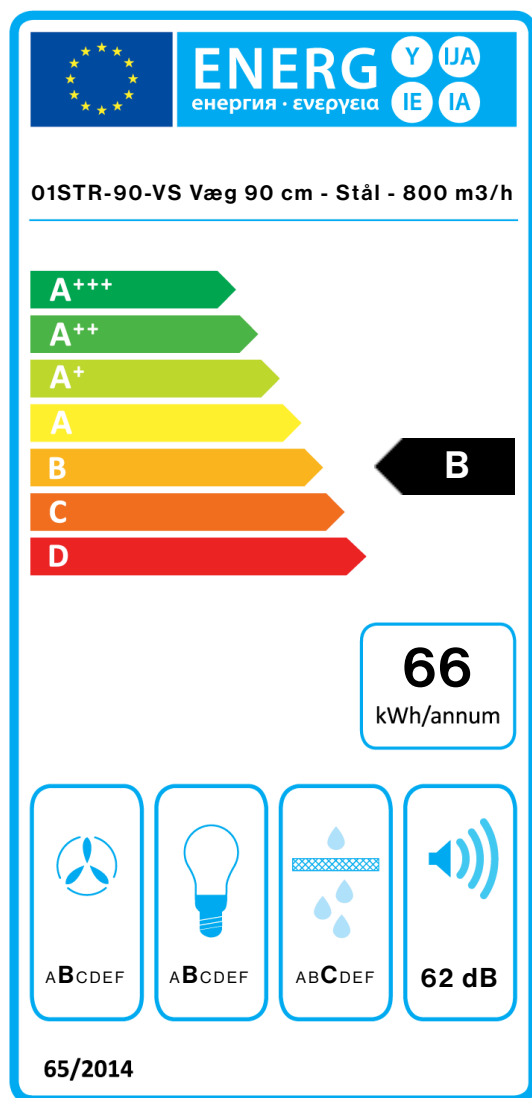

PF		
S	Falmec Spa	
M	01STR-90-VS Væg 90 cm - Stål - 800 m ³ /h	
AEC	66,1	kWh/a
EEC	B	
FDE	26,3	
FDEC	B	
LE	20,5	
LEC	B	
GFE	80,0	
GFEC	C	
Qmin	280,0	m ³ /h
Qmax	480,0	m ³ /h
Qboost	680,0	m ³ /h
SPEmin	49	dBa
SPEmax	62	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W
PI		
F	1,1	
EEl	63,9	
Qbep	382,0	m ³ /h
Pbep	384	Pa
Qboost	680,0	m ³ /h
Wbep	155,1	W
WL	5,30	W
Emiddle	109	lux
Lwa-SPEmax	62	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax_Sound pressure level at the highest speed.