

VIRGOLA

Versiune

Incorporat 90 cm - 600 m3/h

Colectie

Design

Cod EAN

8034122345260



Fotografie cu caracter strict orientativ
Aceasta poate sa nu corespunda versiunii selectate

CARACTERISTICI

Sticla curbata tratata termic
Control electronic
Filtru de grasime metalic,
detasabil si lavabil
Filtru de carbon inclus
Dynamic LED Light (2700K -
5600K)

ACCESORII OPTIONALE

KACL.815

Lavete pentru curatare inox
(cutie 10 buc)

KCVJN.00#3

Masca telescopica pentru
tubulatura h 185 + h 185

KCVJN.01#3

Masca pentru tubulatura h 120
mm

103050107

Filtru de carbon rectangular -
Tip 3

CARACTERISTICI TEHNICE

Tip de instalare

Incorporata

Dimensiuni

90 cm

Finisaj

Sticla tratata termic curbata
Scotch brite stainless steel

Motor

600 m³/h

Tipul panoului de control

Control electronic

Setari de viteza

3

Illuminare

LED 2x1,2 W - 3200 K

Filtru

4 x Filtru metalic "Base" -
245x207 mm

Filtru de Carbon

Filtru de carbon rectangular -
Tip 3 (inclus)

Distanta minima

Plita cu gaz: 52 cm

Plita electrica: 52 cm

AMBALARE: GREUTATE SI
VOLUM

Greutate bruta

15 kg

Greutate neta

11.6 kg

Volum

0.19 m³

Dimensiuni ambalaj

Lungime

995 mm

Inaltime

410 mm

Adancime

465 mm

CARACTERISTICI CONSUM SI
CONEXIUNE

Consum maxim

230 W

Curent

220-240V

Frecventa

50-60Hz

Tip stecher

Shuko

FISA TEHNICA MOTOR

Capacitate maxima

480 m³/h

I.E.C. 61591

Nivel de zgomot maxim

65 dB(A)re1pW

I.E.C.60704-2-13

Presiune maxima (Pa)



500 Pa

Putere maxima motor

180 W

CLASA DE ENERGIE

C



VIRGOLA

Versiune

Incorporat 90 cm - 600 m3/h

Colectie

Design


Cod EAN

8034122345260

FISA TEHNICA MOTOR

Viteza motorului	1	2	3
Nivel de zgomot dB(A)re1pW-I.E.C.60704-2-13	49	58	65
Capacitate (m3/h) I.E.C.61591	220	320	480
Presiune maxima (Pa)	270	400	500
Putere motor (W)	100	130	180
Evacuare aer	120	120	120

CAPACITATE/ PRESIUNE

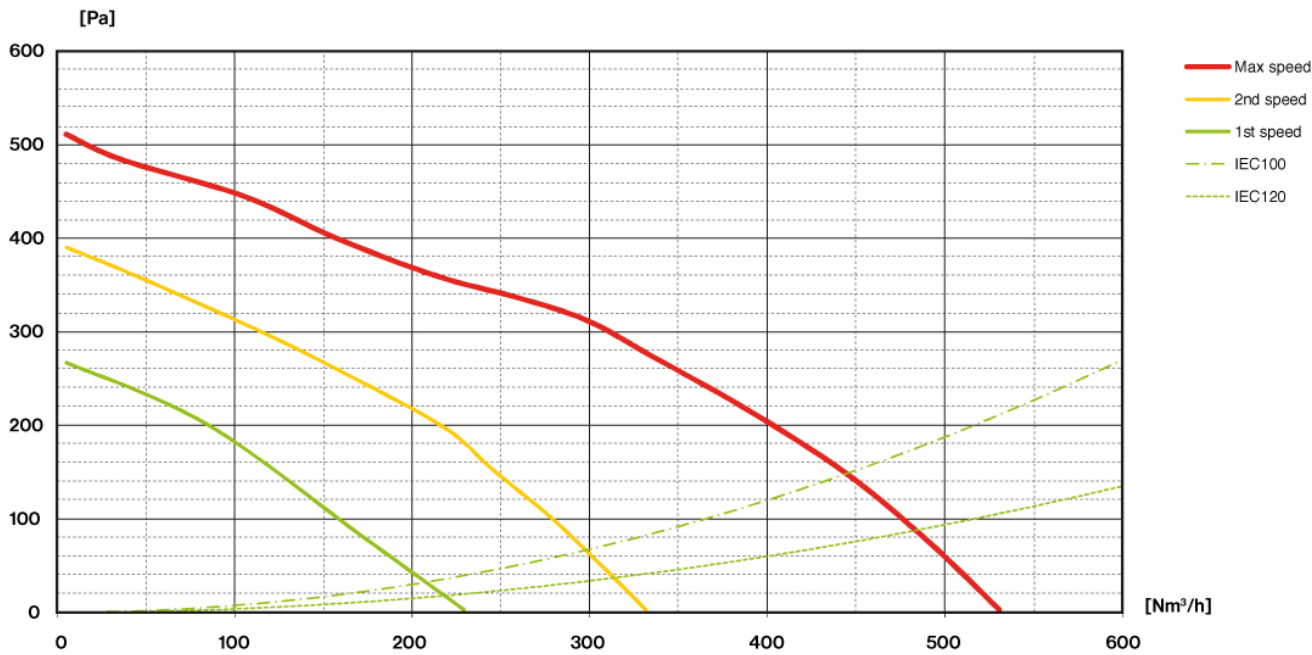

VIRGOLA

Versiune

Incorporat 90 cm - 600 m3/h

Colectie

Design

Cod EAN

8034122345260

ETICHETA DE ENERGIE

