

LUMINA NRS

Version

FNLUM36W5SS / Wall – 36" (90 cm) Steel – 500 CFM

Collection

Silence - NRS

EAN code

8034122345888

FEATURES

Scotch brite stainless steel (AISI 304)

Tempered glass with steel look finish

NRS technology for a quieter kitchen

Touch control + 24 h function

White fluorescent ambient light

Metallic grease filter, removable and washable

Optional charcoal filter

OPTIONAL ACCESSORIES

KACL.570#I

Extension H700 - Wall

KACL.571#I

Extension H960 - Wall

KACL.815

Protective cleaning cloths for stainless steel (box 10 pcs)

KACL.400

Silent / Conveyor NRS

101078900

High performance filter

TECHNICAL FEATURES

Installation type

Wall

Dimensions

36 " / 90 "

Finish

Scotch brite stainless steel (AISI 304)

Tempered glass with white finish

Motor

500 CFM

Type of control

Touch control

Speed settings

4

Lighting

Fluorescent 1x21 W

Filter

Metallic filter "Base" - 274x274 mm - 2 pz

Charcoal filter

High performance filter

Minimum distance

Gas hob: 26 in

Electric hob: 21 in

PACKAGING:WEIGHTS AND VOLUMES

Gross weight

93 lbs

Net weight

80 lbs

Volume

19 ft³

Packaging size

Length

41 in

Height

30 in

Depth

27 in

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

340 W

Voltage / Frequency

120V 60Hz

Plug type

standard

MOTOR TECHNICAL SHEET

Maximum capacity

610 m³/h

I.E.C. 61591

Maximum noise level

54,5 dB(A)re1pW


I.E.C.60704-2-13

Maximum pressure (Pa)

510 Pa

Max. motor power

224 W

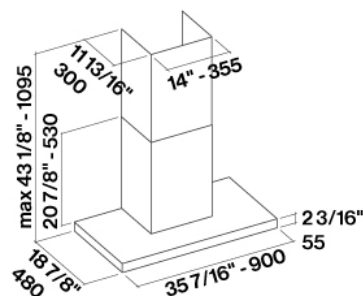

LUMINA NRS

Version

FNLUM36W5SS / Wall – 36" (90 cm) Steel – 500 CFM

Collection

Silence - NRS

EAN code

8034122345888

MOTOR TECHNICAL SHEET

Motor Speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	37	41	46	54,5
Capacity (m3/h) I.E.C.61591 Normalized Pipes	220	290	375	610
Maximum pressure (Pa)	390	440	490	510
Motor Power (W)	130	150	178	224
Air outlet	150	150	150	150