

## ELIOS

### Versiune


Colt 90 cm - 800 m<sup>3</sup>/h

### Colectie

Design

### Cod EAN

8034122341781

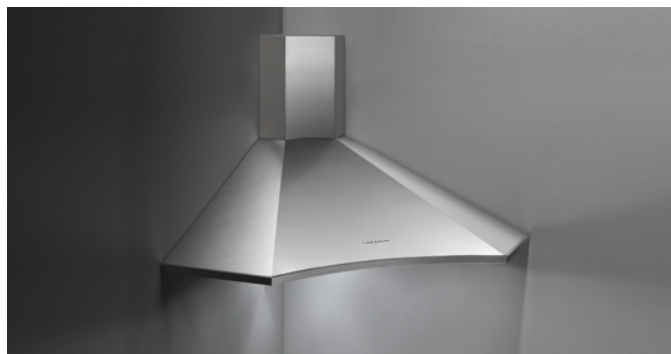

Fotografie cu caracter strict orientativ  
Aceasta poate sa nu corespunda versiunii selectate

## CARACTERISTICI

### Control electronic

### Iluminare cu LED

### Filtru de aer Air Falmec pentru aspiratie echilibrata

### Filtru de carbon inclus

## ACCESORII OPTIONALE

### KACL.560#1

Extensie H850 - Perete

### KACL.770#41F

Motor de acoperis 1100 m<sup>3</sup>/h

Brushless

### KACL.786#41F

Motor de exterior 1000 m<sup>3</sup>/h

### KACL.796#4AF

Motor de exterior 1500 m<sup>3</sup>/h

### KACL.797#4AF

Motor de acoperis 1300 m<sup>3</sup>/h

### KACL.798#41F

Motor de acoperis 950 m<sup>3</sup>/h

### KACL.815

Lavete pentru curatare inox

(cutie 10 buc)

## CARACTERISTICI TEHNICE

### Tip de instalare

De colt

### Dimensiuni

90 cm

### Finisaj

Inox Scotch Brite (AISI 304)

Finisaj parte inferioara rama:

Inox

### Motor

800 m<sup>3</sup>/h

### Tipul panoului de control

Control electronic

### Setari de viteza

4

### Iluminare

LED 3x1,2 W - 3200 K

Filtru metalic "Air Falmec" -

Perete 278x301 mm

### Filtru de Carbon

Filtru de carbon rotund Ø170 mm

- Tip 6 (inclus)

### Distanta minima

Plita cu gaz: 65 cm

Plita electrica: 52 cm

## AMBALARE: GREUTATE SI VOLUM

### Greutate bruta

22 kg

### Greutate neta

15 kg

### Volum

0.51 m<sup>3</sup>

### Dimensiuni ambalaj

Lungime

1115 mm

Inaltime

415 mm

Adancime

1100 mm

## CARACTERISTICI CONSUM SI CONEXIUNE

### Consum maxim

280 W

### Curent

220-240V

### Frecventa

50-60Hz

### Tip stecher

Shuko

## FISA TEHNICA MOTOR

### Capacitate maxima

680 m<sup>3</sup>/h

I.E.C. 61591

### Nivel de zgomot maxim

68 dB(A)re1pW

I.E.C.60704-2-13

### Presiune maxima (Pa)


500 Pa

### Putere maxima motor

215 W

## CLASA DE ENERGIE

B



## ELIOS

### Versiune

Colt 90 cm - 800 m<sup>3</sup>/h

### Colectie

Design


### Cod EAN

8034122341781

## FISA TEHNICA MOTOR

Viteza motorului	1	2	3	4
Nivel de zgomot dB(A)re1pW-I.E.C.60704-2-13	49	56	62	68
Capacitate (m <sup>3</sup> /h) I.E.C.61591	280	370	480	680
Presiune maxima (Pa)	390	420	480	500
Putere motor (W)	132	153	175	215
Evacuare aer	150	150	150	150

## CAPACITATE/ PRESIUNE

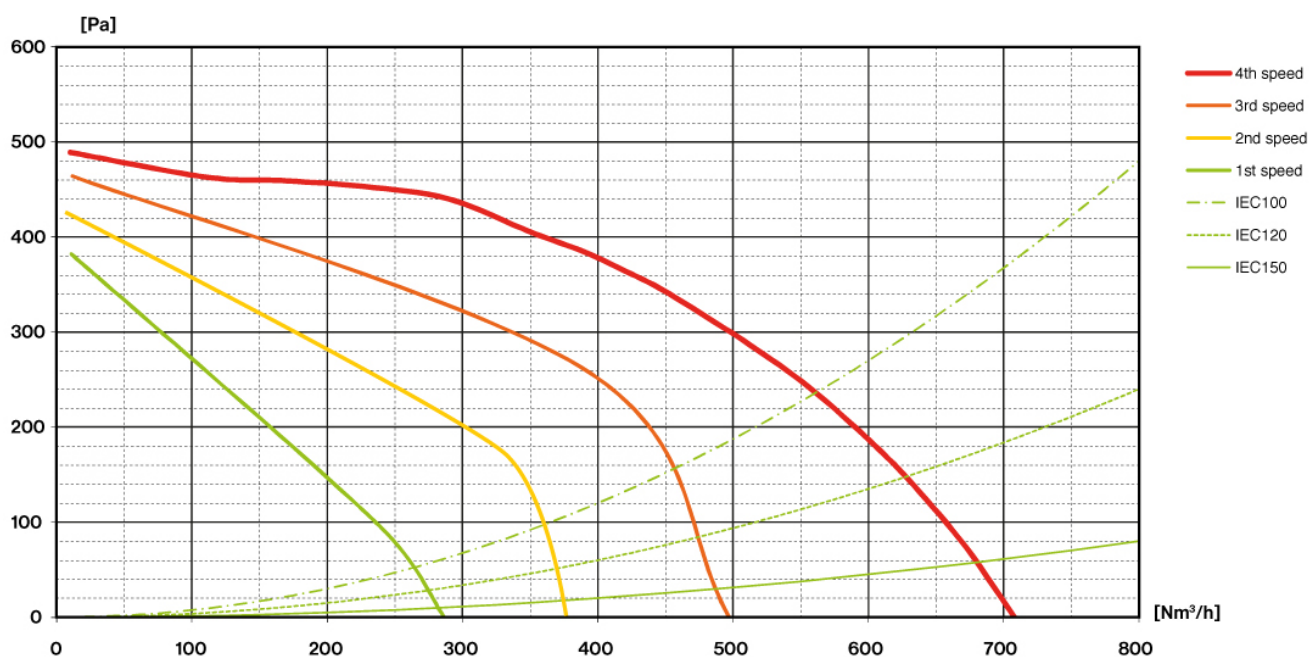

## ELIOS

### Versiune

Colt 90 cm - 800 m3/h


### Colectie

Design

### Cod EAN

8034122341781

## ETICHETA DE ENERGIE

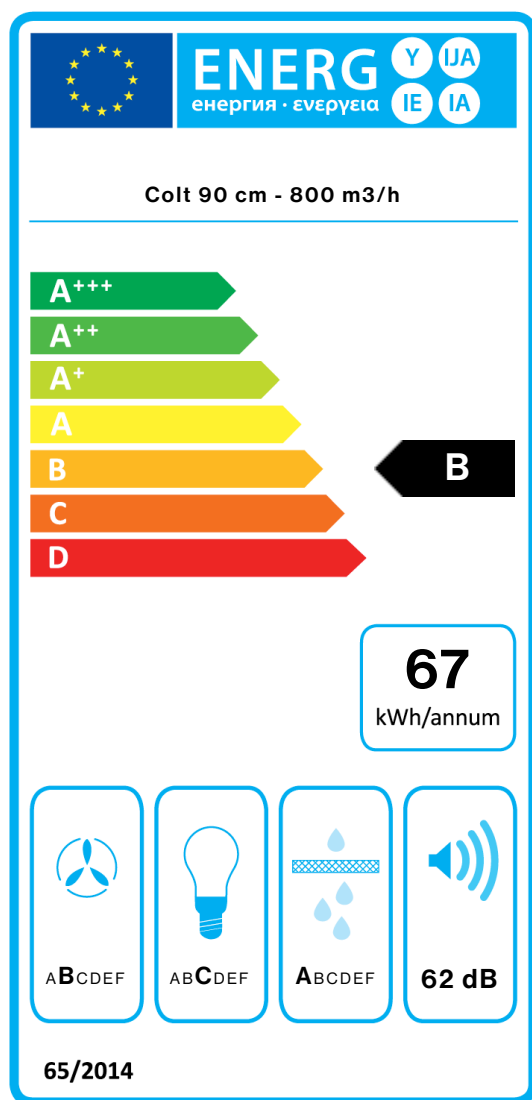

PF		
S	Falmec Spa	
M	Colt 90 cm - 800 m3/h	
AEC	67,0	kWh/a
EEC	B	
FDE	26,3	
FDEC	B	
LE	18,3	
LEC	C	
GFE	96,0	
GFEC	A	
Qmin	280,0	m <sup>3</sup> /h
Qmax	480,0	m <sup>3</sup> /h
Qboost	680,0	m <sup>3</sup> /h
SPEmin	49	dBa
SPEmax	62	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W
PI		
F	1,1	
EEl	64,3	
Qbep	382,0	m <sup>3</sup> /h
Pbep	384	Pa
Qboost	680,0	m <sup>3</sup> /h
Wbep	155,1	W
WL	6,50	W
Emiddle	119	lex
Lwa-SPEmax	62	dBa