

LAGUNA

Version

Wall 60 cm - 800 m³/h

Collection

Design+

EAN code

8034122350905

KACL.824#N

Black glass - Wall 60 cm

Collection

Accessoires

EAN code

8034122709369



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

Scotch brite stainless steel (AISI 304)
Tempered glass
Perimeter suction
Touch control + 24 h function
Metallic grease filter, removable and washable
Charcoal filter included

OPTIONAL ACCESSORIES

KACL.815

Protective cleaning cloths for stainless steel (box 10 pcs)

KACL.824#F

White glass - Wall 60 cm

KACL.824#N

Black glass - Wall 60 cm

KACL.798#41F

Remote under-roof motor 950 m³/h

KACL.770#41F

Remote under-roof 1100 m³/h

Brushless

KACL.786#41F

Outdoor extractor fan 1000 m³/h

KACL.796#4AF

Outdoor extractor fan 1500 m³/h

KACL.797#4AF

Remote under-roof motor 1300 m³/h

TECHNICAL FEATURES

Installation type

Wall

Dimensions

60 cm

Finishing

Scotch brite stainless steel (AISI 304)

Tempered glass

Motor

800 m³/h

Type of control

Touch control

Speed settings

4

Lighting

Led 4x1,2 W - 3200 K

Filter

Metallic filter "Base" - 235x245 mm - 2 pz

Charcoal filter

Round charcoal filter Ø170 mm - Type 6

Minimum distance

Gas hob: 60 cm

Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

LAGUNA

Wall 60 cm - 800 m³/h

Gross weight

27.00 kg

Net weight

21.00 kg

Volume

0.39 m³

Packaging size

Length

1035 mm

Height

740 mm

Depth

510 mm

GLASS KIT

Black glass - Wall 60 cm

Gross weight

15.00 kg

Net weight

13.00 kg

Volumes

0.06 m³

Packaging size

Length

745 mm

Height

105 mm

Depth

655 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

280 W

Voltage / Frequency

220-240V

50-60Hz

Plug type

Shuko

MOTOR TECHNICAL SHEET

Maximum capacity

670 m³/h

I.E.C. 61591

Maximum noise level

67 dB(A)re1pW

I.E.C.60704-2-13

Maximum pressure (Pa)

500 Pa

Max. motor power

215 W

ENERGY CLASS

B

LAGUNA

Version

Wall 60 cm - 800 m³/h

Collection

Design+

EAN code

8034122350905

KACL.824#N


Black glass - Wall 60 cm

Collection

Accessoires

EAN code

8034122709369



LAGUNA

KACL.824#N

Black glass - Wall 60 cm

Version

Wall 60 cm - 800 m³/h

Collection

Accessoires

Collection

Design+

EAN code

8034122709369


EAN code

8034122350905

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	49	55	61	67
Capacity (m3/h) I.E.C.61591 Normalized Pipes	270	360	470	670
Maximum pressure (Pa)	390	420	460	500
Motor Power (W)	134	156	180	215
Air outlet	150	150	150	150

CAPACITY / PRESSURE

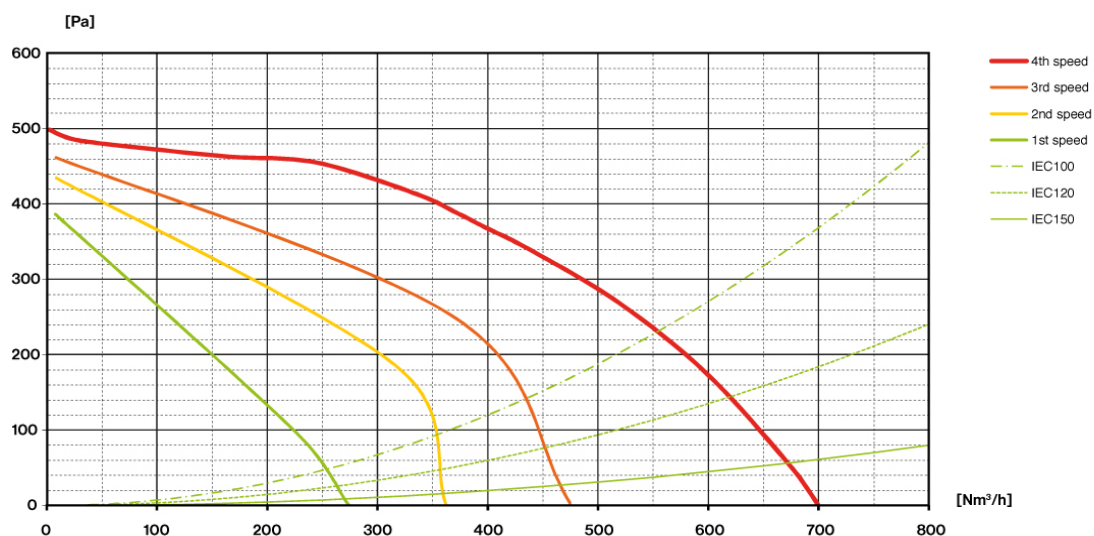

LAGUNA

KACL.824#N

Black glass - Wall 60 cm

Version

Wall 60 cm - 800 m³/h

Collection

Accessoires

EAN code

8034122709369


Collection

Design+

EAN code

8034122350905

ENERGY LABEL

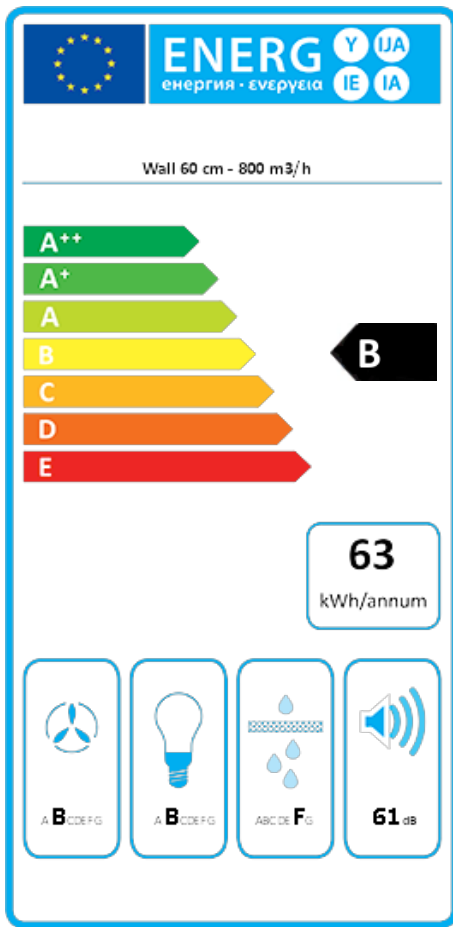

PF		
S	Falmec Spa	
M	Wall 60 cm - 800 m ³ /h	
AEC	63,2	kWh/a
ECC	B	
FDE	25,5	
FDEC	B	
LE	20,5	
LEC	B	
GFE	53,0	
GFEC	F	
Qmin	270,0	m ³ /h
Qmax	470,0	m ³ /h
Qboost	670,0	m ³ /h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	1,1	
EEl	63,5	
Qbep	333,0	m ³ /h
Pbep	407	Pa
Qboost	670,0	m ³ /h
Wbep	147,7	W
WL	5,30	W
Emiddle	109	lux
Lwa-SPEmax	61	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.