

FLIPPER

Version

Wall 55 cm - Black - 800 m³/h

Collection

Design

EAN code

8034122352213



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

- Electronic control**
- LED lighting**
- Metallic grease filter, removable and washable**
- Optional combined regenerable Carbon.Zeo filter**
- Charcoal filter included**
- Possible to duct wall mounted from rear**
- Optional Chimney**
- Black tempered glass with steel central band**

OPTIONAL ACCESSORIES

- KACL.770#41F**
Remote under-roof 1100 m³/h
Brushless
- KACL.786#41F**
Outdoor extractor fan 1000 m³/h
- KACL.796#4AF**
Outdoor extractor fan 1500 m³/h
- KACL.797#4AF**
Remote under-roof motor 1300 m³/h
- KACL.798#41F**
Remote under-roof motor 950 m³/h
- KACL.941**
External filter unit for sloped hoods
- KCQAN.00#I**
Chimney (Inox)
- KCQAN.00#N**
Optional chimney (Black)

TECHNICAL FEATURES

- Installation type**
Wall
- Dimensions**
55 cm
- Finishing**
Black glass satin finishing
Black tempered glass with
Stainless Steel central band
- Motor**
800 m³/h
- Type of control**
Electronic control
- Speed settings**
4
- Lighting**
Led 2x1,2 W - 3200 K
- Filter**
2 x Metallic filter "Base" -
284x234 mm
- Charcoal filter**
Round charcoal filter Ø170 mm -
Type 6 (optional)
- Minimum distance**
Gas hob: 52 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES



- Gross weight**
22 kg
- Net weight**
17 kg
- Volumes**
0.25 m³
- Packaging size**
Length
775 mm
Height
450 mm
Depth
705 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption**
280 W
- Voltage**
220-240V
- Frequency**
50-60Hz
- Plug type**
Shuko

MOTOR TECHNICAL SHEET

- Maximum capacity**
750 m³/h
I.E.C. 61591
- Maximum noise level**
66 dB(A)re1pW
I.E.C.60704-2-13
- Maximum pressure (Pa)**
510 Pa
- Max. motor power**
224 W
- ENERGY CLASS**
A

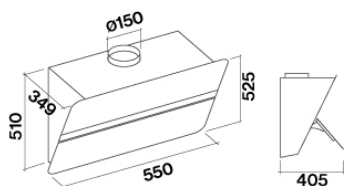

FLIPPER

Version

Wall 55 cm - Black - 800 m³/h

Collection

Design


EAN code

8034122352213

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A) _{re1pW-I.E.C.60704-2-13}	46	53	58	66
Capacity (m ³ /h) I.E.C.61591	295	390	500	750
Maximum pressure (Pa)	390	440	490	510
Motor Power (W)	130	150	178	224
Air outlet	150	150	150	150

CAPACITY / PRESSURE

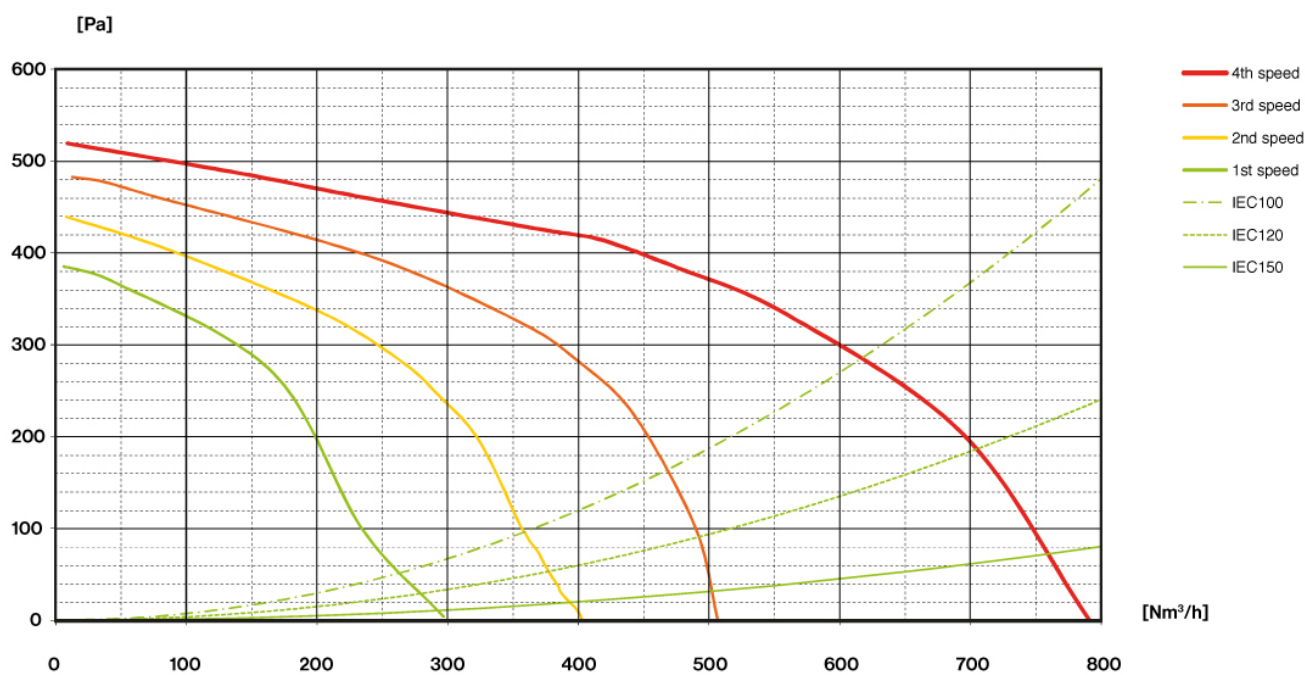

FLIPPER

Version

Wall 55 cm - Black - 800 m³/h


Collection

Design

EAN code

8034122352213

ENERGY LABEL

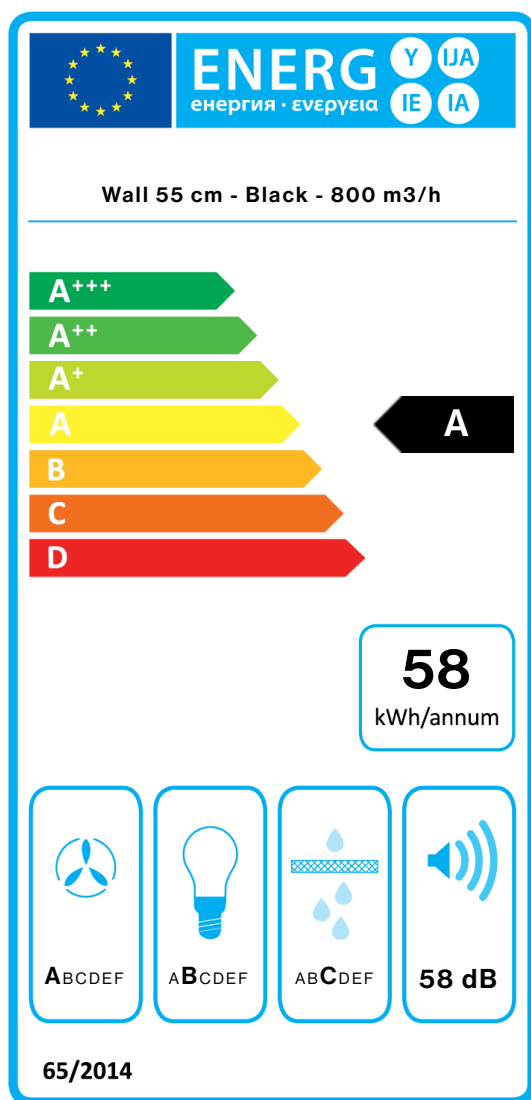

PF		
S	Falmec Spa	
M	Wall 55 cm - Black - 800 m ³ /h	
AEC	57,7	kWh/a
EEC	A	
FDE	29,4	
FDEC	A	
LE	21,6	
LEC	B	
GFE	82,0	
GFEC	C	
Qmin	295,0	m ³ /h
Qmax	500,0	m ³ /h
Qboost	750,0	m ³ /h
SPEmin	46	dBa
SPEmax	58	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEL	53,2	
Qbep	430,0	m ³ /h
Pbep	404	Pa
Qboost	750,0	m ³ /h
Wbep	164,0	W
WL	5,30	W
Emiddle	114	lx
Lwa-SPEmax	58	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.