falmec

VIRGOLA BLACK NO-DROP

Version
Built-in - 90 cm - 800 m3/h

Collection
No-Drop

EAN code
8034122361437

Photograph is for information purposes only
It may not correspond to the selected version.

FEATURES

Glass panel
Electronic control
Charcoal filter (optional)
Optional Chimney
Dynamic Light (2700K - 5600K)
No-Drop System anti-condensation patented technology
Anti-condensation no-drop filter in technopolymer

Availability Carbon.Zeo filter KACL.961 for hoods produced from 12/01/2020

OPTIONAL ACCESSORIES

KACL.107
Glass shelf 90 cm
KACL.954
Cellular charcoal filter (for Virgola No-Drop hoods <08/06/2020)
KACL.960
Charcoal filter
KCVJN.00#3
Telescopic chimney h 185 + h 185 - Inox
KCVJN.01#3
Chimney h 120 mm - Inox

TECHNICAL FEATURES

Installation type
Built-in
Dimensions
90 cm
Finishing
Painted black steel
Motor
800 m³/h
Type of control
Electronic control
Speed
3 + boost
Lighting
Led 2x1,2 W - 2700 K / 5600 K
Minimum distance
Gas hob: 52 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

Gross weight
17.6 kg
Net weight
13.8 kg
Volumes
0.19 m³
Packaging size
Length
995 mm
Height
410 mm
Depth
465 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
280 W
Voltage
220-240V
Frequency
50-60Hz

MOTOR TECHNICAL SHEET

Maximum capacity
670 m³/h
I.E.C. 61591
Maximum noise level
67 dB(A)re1pW
I.E.C.60704-2-13
Maximum pressure (Pa)
500 Pa
Max. motor power
215 W
ENERGY CLASS
B





falmec

VIRGOLA BLACK NO-DROP

Version
Built-in - 90 cm - 800 m3/h

Collection
No-Drop

EAN code
8034122361437

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	49	55	61	67
Capacity (m3/h) I.E.C.61591	270	360	470	670
Maximum pressure (Pa)	390	420	460	500
Power (W)	134	156	180	215
Air outlet	150	150	150	150

CAPACITY / PRESSURE

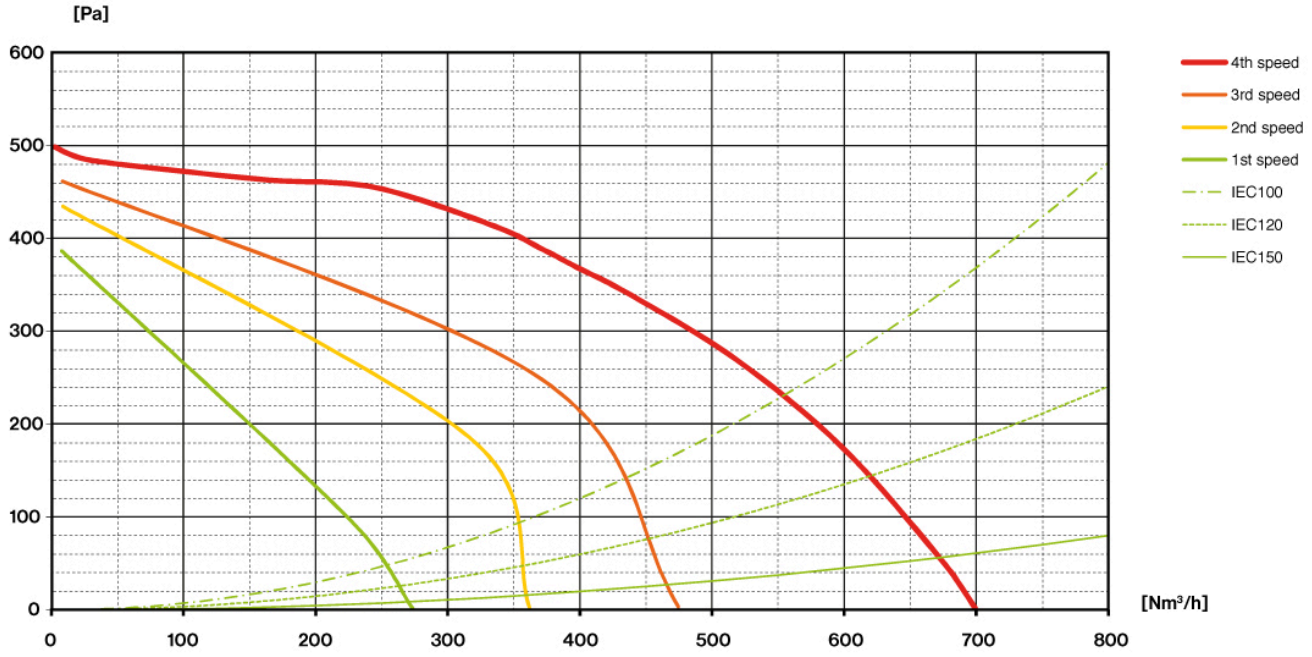

falmec

VIRGOLA BLACK NO-DROP

Version
Built-in - 90 cm - 800 m3/h

Collection
No-Drop

EAN code
8034122361437

ENERGY LABEL

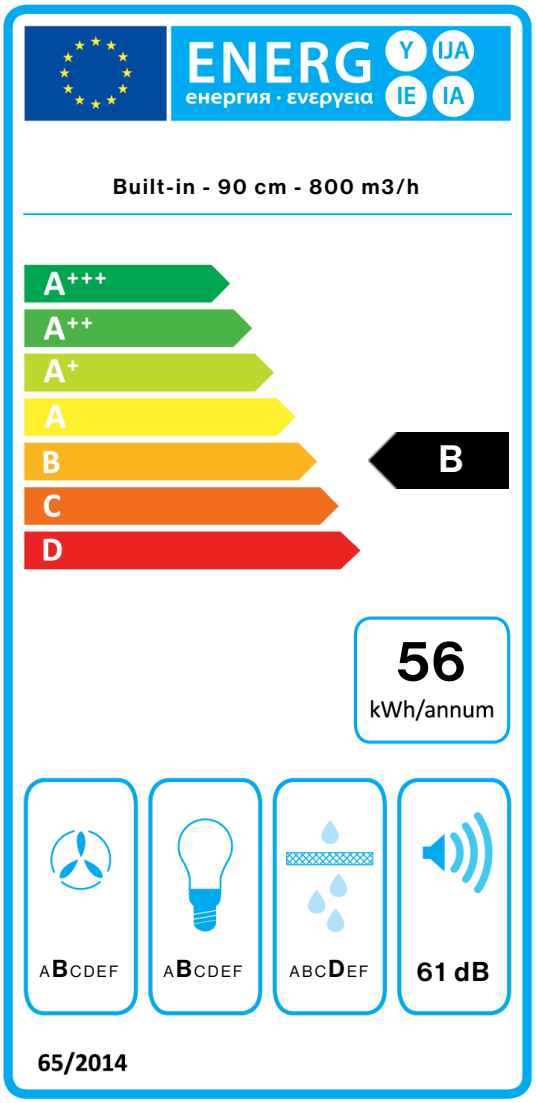

PF		
S	Falmec Spa	
M	Built-in - 90 cm - 800 m3/h	
AEC	55,7	kWh/a
EEC	B	
FDE	26,4	
FDEC	B	
LE	27,9	
LEC	B	
GFE	70,0	
GFEC	D	
Qmin	250,0	m³/h
Qmax	480,0	m³/h
Qboost	620,0	m³/h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEI	57,8	
Qbep	364,0	m³/h
Pbep	371	Pa
Qboost	620,0	m³/h
Wbep	142,0	W
WL	5,30	W
Emiddle	148	lux
Lwa-SPEmax	61	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airbone acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.