

PRISMA

Version

FDPRI36W5SB Wall 36"/85 cm
- 500CFM - Stainless and
Black Glass

Collection

Design+

EAN code

8034122359137



Photograph is for information purposes only
May not correspond to the selected version

FEATURES

- LED ambient light
- LED lighting
- Top filter, removable and washable
- Combined regenerable
- Carbon.Zeo filter (optional)
- Charcoal filter
- Possible to duct wall mounted from rear
- Optional Chimney

OPTIONAL ACCESSORIES

FDNUVMTR600

FDNUVMTR600 - Motor 600 CFM for North America

FFCHAR3C0BL

FFCHAR3C0BL - Round charcoal filter Ø 6' - Type 6

KACL.815

Protective cleaning cloths for stainless steel (box 10 pcs)

KCQAN.00#I

Chimney (Inox)

TECHNICAL FEATURES

Installation type

Wall

Dimensions

36 / 85 cm

Finish

Black tempered glass

Motor

500 CFM

Type of control

Touch control

Speed

4

Lighting

Led 2x1,2 W - 3200 K

Ambient lighting

Led 2x1,2 W - 3200 K

Metallic filter

Filter

2 x Metallic filter "Top" - 196x258 mm

Charcoal filter

FFCHAR3C0BL - Round charcoal filter Ø 6' - Type 6 (optional)

Minimum distance

Gas hob: 21 in

Electric hob: 21 in

PACKAGING:WEIGHTS AND VOLUMES

Gross weight

60 lbs

Net weight

49 lbs

Volumes

11 ft³

Packaging size

Length

40 in

Height

21 in

Depth

24 in

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

280 W

MOTOR TECHNICAL SHEET

Maximum capacity

750 m³/h

I.E.C. 61591

Maximum noise level

66 dB(A)re1pW




I.E.C.60704-2-13

Maximum pressure (Pa)

510 Pa

Max. motor power

224 W

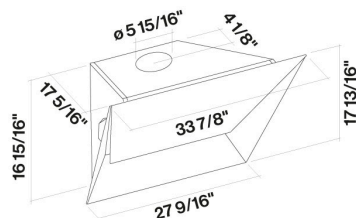

PRISMA

Version

FDPRI36W5SB Wall 36"/85 cm
- 500CFM - Stainless and
Black Glass

Collection

Design+

EAN code

8034122359137

MOTOR TECHNICAL SHEET

Motor Speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	46	53	58	66
Capacity (m3/h) I.E.C.61591	295	390	500	750
Maximum pressure (Pa)	390	440	490	510
Power (W)	130	150	178	224
Air outlet	150	150	150	150

CAPACITY / PRESSURE

