

PRISMA

Version

FDPRI36W5SB Wall 36"/85 cm
- 500CFM - Stainless and
Black Glass

Collection

Design+

EAN code

8034122359137



Photograph is for information purposes only
May not correspond to the selected version

FEATURES

LED ambient light
LED lighting
Top filter, removable and washable
Combined regenerable Carbon.Zeo filter (optional)
Charcoal filter
Possible to duct wall mounted from rear
Optional Chimney

OPTIONAL ACCESSORIES

FDNUMTR600

FDNUMTR600 - Motor 600 CFM for North America

FFCHAR3COBL

FFCHAR3COBL - Round charcoal filter Ø 6" - Type 6

KACL.815

Protective cleaning cloths for stainless steel (box 10 pcs)

KCQAN.00#I

Chimney (Inox)

TECHNICAL FEATURES

Installation type
Wall
Dimensions
36 / 85 cm
Finish
Black tempered glass
Motor
500 CFM
Type of control
Touch control
Speed settings
4
Lighting
Led 2x1,2 W - 3200 K
Ambient lighting
Led 2x1,2 W - 3200 K
Filter
Metallic filter
2 x Metallic filter "Top" - 196x258 mm
Charcoal filter
FFCHAR3COBL - Round charcoal filter Ø 6" - Type 6 (optional)
Minimum distance
Gas hob: 21 in
Electric hob: 21 in

PACKAGING:WEIGHTS AND VOLUMES




Gross weight
60 lbs
Net weight
49 lbs
Volumes
11 ft³
Packaging size
Length
40 in
Height
21 in
Depth
24 in

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
280 W

MOTOR TECHNICAL SHEET

Maximum capacity
750 m³/h
I.E.C. 61591
Maximum noise level
66 dB(A)re1pW
I.E.C.60704-2-13
Maximum pressure (Pa)
510 Pa
Max. motor power
224 W

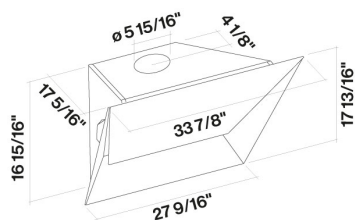

PRISMA

Version

FDPRI36W5SB Wall 36"/85 cm
- 500CFM - Stainless and
Black Glass

Collection

Design+

EAN code

8034122359137

MOTOR TECHNICAL SHEET

Motor Speed	1	2	3	4
Noise level dB(A) _{re1pW-I.E.C.60704-2-13}	46	53	58	66
Capacity (m ³ /h) I.E.C.61591	295	390	500	750
Maximum pressure (Pa)	390	440	490	510
Motor Power (W)	130	150	178	224
Air outlet	150	150	150	150

CAPACITY / PRESSURE

