

BUILT-IN

Version

Built-in EVO - 50 cm - 600 m³/h

Collection

Design

EAN code

8034122504391



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

Mechanical control

LED lighting

**Metallic grease filter,
removable and washable**

Optional charcoal filter

Charcoal filter type 6 code

103050091 from 11.15.21.

Charcoal filter type 2 code

103050102 until 11.15.21.

OPTIONAL ACCESSORIES

103050091


Round charcoal filter Ø170 mm -

Type 6

103050102

Round charcoal filter Ø212 mm -

Type 2



TECHNICAL FEATURES

Installation type

Wall

Dimensions

50 cm

Finishing

Scotch brite stainless steel

Motor

600 m³/h

Type of control

Mechanical control

Speed settings

3

Lighting

Led 2x1,2 W - 3200 K

Minimum distance

Gas hob: 62 cm

Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

Gross weight

7 kg

Net weight

5.1 kg

Volumes

0.09 m³

Packaging size

Length

610 mm

Height

380 mm

Depth

375 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

230 W

Voltage

220-240V

Frequency

50-60Hz

MOTOR TECHNICAL SHEET

Maximum capacity

480 m³/h

I.E.C. 61591

Maximum noise level

65 dB(A)re1pW

I.E.C.60704-2-13

Maximum pressure (Pa)

500 Pa

Max. motor power

180 W

ENERGY CLASS

C

BUILT-IN

Version

Built-in EVO - 50 cm - 600
m³/h

Collection

Design


EAN code

8034122504391

MOTOR TECHNICAL SHEET

Motor speed	1	2	3
Noise level dB(A) _{re1pW-I.E.C.60704-2-13}	49	58	65
Capacity (m ³ /h) I.E.C.61591	220	320	480
Maximum pressure (Pa)	270	400	500
Motor Power (W)	100	130	180
Air outlet	120	120	120

CAPACITY / PRESSURE

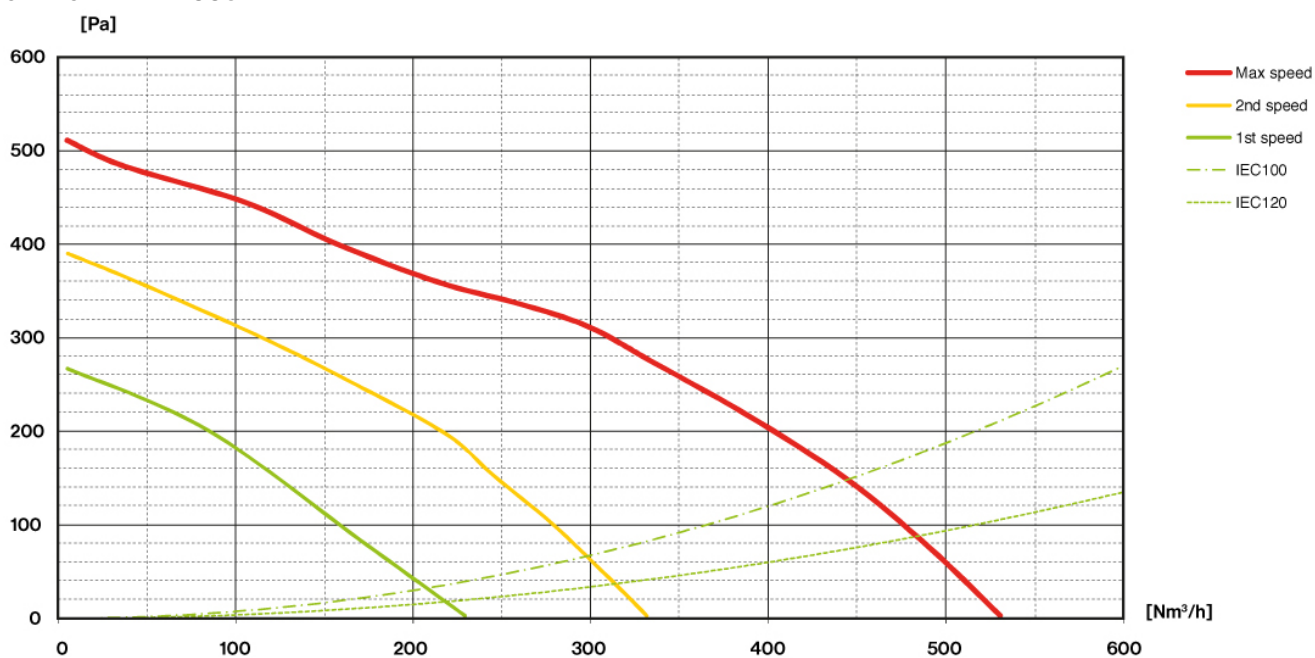

BUILT-IN

Version

Built-in EVO - 50 cm - 600 m3/h


Collection

Design

EAN code

8034122504391

ENERGY LABEL

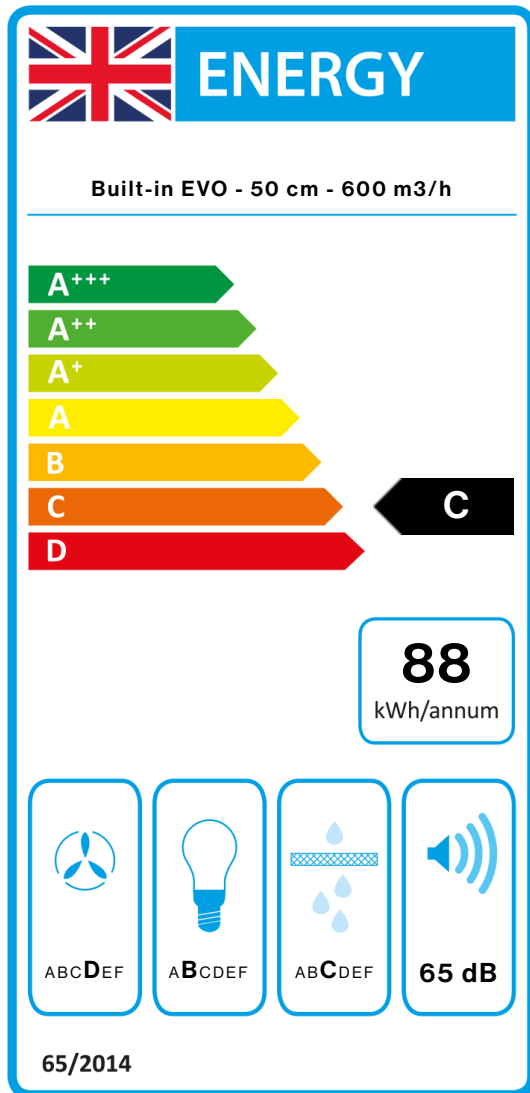

PF		
S	Falmec Spa	
M	Built-in EVO - 50 cm - 600 m3/h	
AEC	87,7	kWh/a
EEC	C	
FDE	15,8	
FDEC	D	
LE	20,5	
LEC	B	
GFE	80,0	
GFEC	C	
Qmin	220,0	m ³ /h
Qmax	480,0	m ³ /h
Qboost	480,0	m ³ /h
SPEmin	49	dBa
SPEmax	65	dBa
SPEboost	-	dBa
PO	-	W
PS	0,00	W
PI		
F	1.4	
EEl	80,9	
Qbep	303,0	m ³ /h
Pbep	308	Pa
Qboost	480,0	m ³ /h
Wbep	164,0	W
WL	5,30	W
Emiddle	109	lux
Lwa-SPEmax	65	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax_Sound pressure level at the highest speed.