

QUANTUM EASY

Version

Worktop 84 cm - 600 m³/h

Collection

Cooking systems

EAN code

8034122900292



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

- Touch control
- Residual heat indicators
- Keep warm function
- 9 cooking levels + Double Booster
- 9 cooking levels + Power function (Over Boost)
- Pot detector sensor
- Timer / minute minder
- Safety switch-off / safety lock function
- Double Bridge Function
- Automatic shut-off timer
- Power management system on three levels: 2.8 kw, 3.5 kw, 7.4 kw
- Brushless Motor
- Touch control with LED display
- Carbon.Zeo/Metallic filter maintenance warning
- Auto mode (suction speed automatically adjusts to cooking power)
- 4 cooking areas with Flex Surface technology
- Schott black ceramic glass
- Motorized flap system
- Black steel extraction area frame with surface scratchproof system

TECHNICAL FEATURES

- Installation type**
Worktop
- Dimensions**
84 cm
- Finishing**
Schott black ceramic glass
- Motor**
600 m³/h
- Type of control**
Touch control
- Charcoal filter**
Carbon and Zeolite anti-odor filter (included)

PACKAGING:WEIGHTS AND VOLUMES

- Gross weight**
33 kg
- Net weight**
26.9 kg
- Volumes**
0.24 m³
- Packaging size**

 - Length
1055 mm
 - Height
375 mm
 - Depth
610 mm




CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption**
7560 W
- Voltage**
220-240V
- Frequency**
50-60Hz
- ENERGY CLASS**
A+

OPTIONAL ACCESSORIES

KACL.963

Carbon and Zeolite anti-odor filter



Side view

top view

front view

Anti-noise conveyer

QUANTUM EASY

Version

Worktop 84 cm - 600 m3/h


Collection

Cooking systems

EAN code

8034122900292

ENERGY LABEL

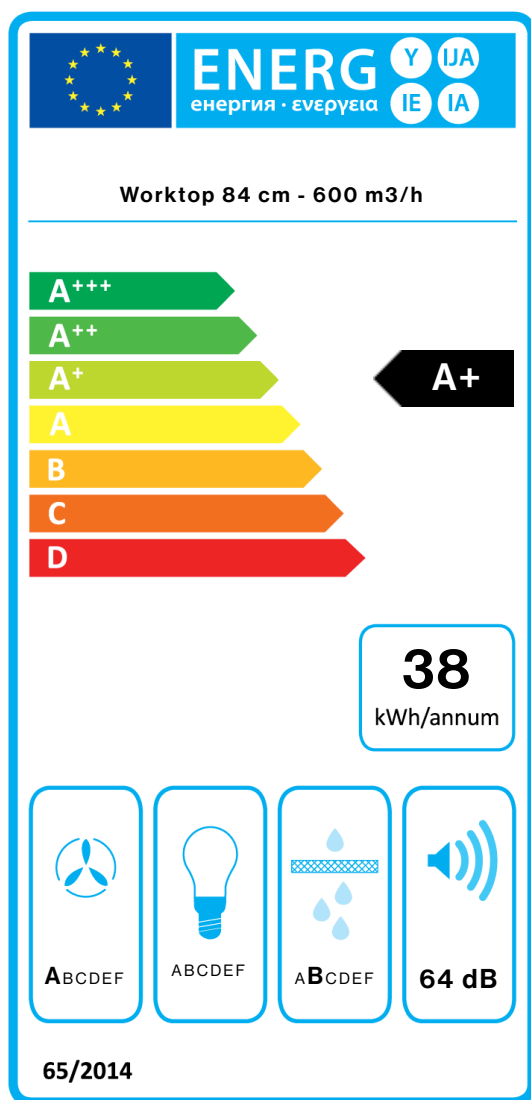

PF		
S	Falmec Spa	
M	Worktop 84 cm - 600 m3/h	
AEC	38,3	kWh/a
EEC	A+	
FDE	33,1	
FDEC	A	
LE	0,0	
LEC		
GFE	87,0	
GFEC	B	
Qmin	170,0	m³/h
Qmax	390,0	m³/h
Qboost	495,0	m³/h
SPEmin	46	dBa
SPEmax	64	dBa
SPEboost	69	dBa
PO	-	W
PS	0,48	W
PI		
F	0,8	
EEL	43,8	
Qbep	267,0	m³/h
Pbep	584	Pa
Qboost	495,0	m³/h
Wbep	131,0	W
WL	0,00	W
Emiddle	0	lux
Lwa-SPEmax	64	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.